

2MP H.265 IR IP BULLET CAMERA




ENC-HBU5F-35R-68

FEATURES

- 1/2.8" Progressive Scan CMOS
- 6mm (8mm optional)
- 25fps/30fps@2MP
- Triple Streams
- Smart IR Up to 35M
- Support Face, body, head-shoulder detection and capture
- Upto 30 face detection per frame
- IP67



Field Of View

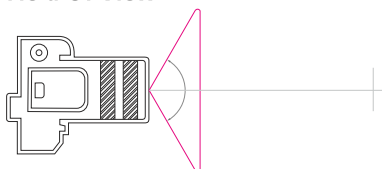

SPECIFICATION

MODEL		ENC-HBU5F-35R-68
Type	2MP H.265 IR IP Bullet Camera	
Image Sensor	1/2.8" Progressive Scan CMOS	
Lens	6mm (8mm Optional)	
Iris	Fixed	
Angle of view(H)	52°	
Shutter	1/5-1/2000s	
Min. illumination	Color:0.01Lux@F1.2, B/W:0Lux@IR LED ON	
AGC	Auto/manual	
Day/Night	ICR	
Digital Noise Reduction	2D/3D DNR	
S/N	55dB	
Smart IR	Upto 35M	
Defog	Digital Defog	
WDR	120dB	
Max. Resolution	1920x1080	
Video Compression	H.265+, H.265, H.264, MJPEG	
Frame Rate	Main Stream: 1920x1080/1280x720 @25/30fps, Sub Stream: D1/VGA/640x360/CIF/QVGA @25/30fps Third Stream: VGA/CIF/QVGA @25/30fps	
Streaming Capability	Triple Stream	
HLC/BLC	Supported	
ROI	Supported	
Privacy masking	Supported	
Motion Detection	Supported	
Behavior Detection	Perimeter, Single Virtual Fence, Double Virtual Fences,	
Intelligent Identification	Multi Loiter, Converse.Support alarm triggering by specified target types (face and human). Filtering out mistaken alarm caused by target types such as leaf, light, animal, and flag, etc.	
Statistical Analysis	Face, Head shoulder, Human body capture	
Capture Functions	Face detection performance: up to 30 faces per frame Detectable face position: supports swing left and right from -45° to 45°, tilt up and down from -25° to 25	



2MP H.265 IR IP BULLET CAMERA




ENC-HBU5F-35R-68

SPECIFICATION

MODEL	Model No.	ENC-HBU5F-35R-68
INTERFACE	Type	2MP H.265 IR IP Bullet Camera
Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP	
Compatibility	Onvif (Profile S/G)	
Network	1 Ethernet (10/100 Base-T) RJ-45 Connector	
GENERAL	Power	DC 12V/POE (IEEE 802.3af)
Power Consumption	5W	
Working Environment	-30°C ~ 50°C, Humidity: <90% RH	
Ingress Protection	IP67	
Dimensions	194.4x63x63mm	
Weight	0.50Kg	

Dimension Unit: mm

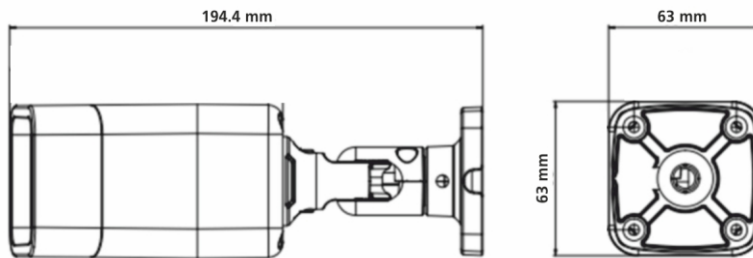

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5F-35R-68	2MP H.265 IR IP Bullet Camera with 6mm(optional 8mm) Fixed lens, PoE, WDR, Smart Analytic features and 35M IR Support with 30 faces detection per frame.	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5F-35R-68	Carton Box	0.50	194.4x63x63

