

2MP 60FPS LOWLIGHT IP H.265 BULLET CAMERA




ENC-HBU5M-30R-70

FEATURES

- 1/2.8" Progressive Scan CMOS
- 2.7~12mm motorized lens
- 50/60fps@2MP
- Triple Streams
- Smart IR Up to 30m
- Electronic Image Stabilization
- IP67



Field Of View

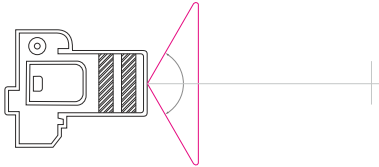

SPECIFICATION

MODEL	Model No.	ENC-HBU5M-30R-70
	Type	2MP 60FPS Lowlight IP H.265 Bullet Camera
CAMERA	Image Sensor	1/2.8" Progressive Scan CMOS
	Lens	2.7~12mm, Motorized lens
	Iris	Auto Iris
	Angle of View (H)	105°~ 32°
	Shutter	1/5-1/20000s
	Min. Illumination	Color:0.001Lux@ F1.2; B/W:0Lux@ (IR LED ON)
	AGC	Auto/Manual
	Day/Night	IR-Cut filter with auto switch (ICR)
	Digital noise reduction	2D/3D DNR
	S/N	55dB
VIDEO & AUDIO	Defog	Digital Defog
	Smart IR	Up to 30M
	WDR	120dB
	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Stream1:1920x1080/1280x720 @50/60fps Stream2: D1/VGA/640x360/CIF/QVGA @25/30fps Stream3: VGA/CIF/QVGA @25/30fps
	Streaming Capability	Triple Stream
	HLC/BLC	Supported
	EIS	Supported
	ROI	Supported
Privacy Mask	Supported	
Motion Detection	Supported	
Audio Compression	G.711U/G.711A	



2MP 60FPS LOWLIGHT IP H.265 BULLET CAMERA




ENC-HBU5M-30R-70

SPECIFICATION

MODEL	Model No.	ENC-HBU5M-30R-70
	Type	2MP 60FPS Lowligh IP H.265 Bullet Camera
	Behavior Detection	Perimeter, Single Virtual Fences, Double Virtual Fences
SMART	Intelligent Identification	Loiter, Multi Loiter, Abandoned Object, Missing object
	Statistical Analysis	Abnormal Speed, Converse, Illegal Parking, Signal Bad
	Protocols	IPv4/IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
INTERFACE	Compatibility	ONVIF (Profile S/G)
	CVBS Output	Supported
	Network	1 Ethernet (10/100 Base-T) RJ-45 Connector
	Audio	1/1
GENERAL	Power	DC 12V/POE (IEEE 802.3af)
	Power consumption	Max 8W
	Storage	Built in Micro SD Slot, Upto 128GB
	Reset Button	Supported
	Working Environment	-40°C ~ +60°C, Humidity: <90% RH
	Ingress Protection	IP67
	Dimensions	264.5x82.7x80.3mm
	Weight	0.83Kg

Dimension Unit: mm

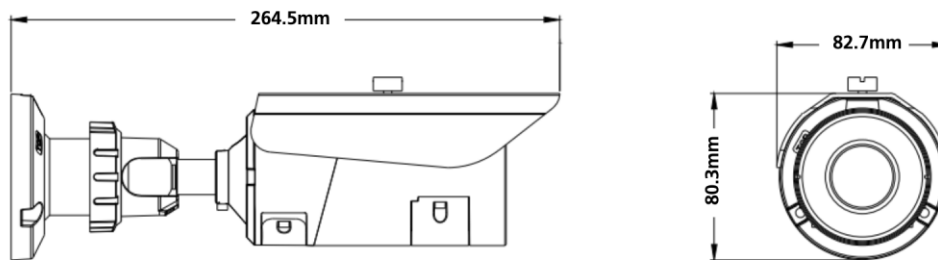

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-30R-70	2MP 60FPS Lowligh IP H.265 Bullet camera with 2.7 to 12mm Motorized Lens, PoE, SD card slot, WDR, Smart Analytics and 30M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5M-30R-70	Carton Box	0.83	264.5x82.7x80.3

