

2MP H.265 IR IP BULLET CAMERA




ENC-HBU5M-40R-73

FEATURES

1/2.8" Progressive Scan CMOS
2.7~13.5mm motorized lens
25fps/30fps@2MP
Triple streams
Support face, human body, vehicle, non-motor detection and capture
High performance, up to 300 faces, human body and 40 vehicles detection per frame
Smart IR Up to 40m
IP67



Field Of View

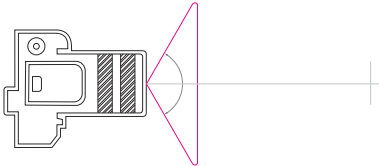

SPECIFICATION

MODEL	Model No.	ENC-HBU5M-40R-73
CAMERA	Type	2MP H.265 IR IP Bullet Camera
	Image Sensor	1/2.8" Progressive Scan CMOS
	Lens	2.7~13.5mm Motorized lens
	Iris	Fixed Iris
	Angle of View(H)	105° ~ 30°
	Shutter	1/5-1/20,000s
	Min. Illumination	Colour: 0.01Lux@F1.2, B/W: 0Lux@IR
	AGC	Auto/Manual
	Day/Night	ICR
	Digital noise reduction	2D/3D DNR
	S/N	>55dB
	IR Range	Up to 40M
	Defog	Digital Defog
	WDR	120dB
VIDEO & AUDIO	Max.Resolution	1920×1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 1920×1080/1280×720 @25/30fps Sub Stream: D1/VGA/640×360/CIF/QVGA @25/30fps Third Stream: VGA/CIF/QVGA @25/30fps
	Streaming Capability	Triple Stream
	ROI	Supported
	HLC/BLC	Supported
	Privacy Mask	Supported
	Motion Detection	Supported
Audio Compression	G.711U/G.711A	
SMART	Behaviour Detection	Perimeter, Single Virtual Fence, Double Virtual Fences
	Intelligent Identification	Multi Loiter, Converse.
	Statistical Analysis	Support alarm triggering by specified target types (human and vehicle).Filtering out mistaken alarm causedby target types such as leaf, light, animal, and flag, etc.
Smart Detection	Detects face, human body, vehicle and non-motor automatically and capture	



2MP H.265 IR IP BULLET CAMERA




ENC-HBU5M-40R-73

SPECIFICATION

MODEL	Model No.	ENC-HBU5M-40R-73
	Type	2MP H.265 IR IP Bullet Camera
INTERFACE	Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
	Compatibility	ONVIF (Profile S/G)
	RS485	Supported
	Network	1 Ethernet (10/100 Base-T) RJ-45 Connector
	Audio I/O	1/1
GENERAL	Alarm I/O	1/1
	Power	DC 12V/PoE (IEEE 802.3af)
	Power consumption	5.5W
	Edge Storage	Built-in MicroSD Slot, Up to 128GB
	Reset Button	Supported
	Working Environment	-30°C ~ 50°C, Humidity: <90% RH
	Ingress Protection	IP67
Dimensions	232x74.8x80mm	
Weight	0.70Kg	

Dimension Unit: mm

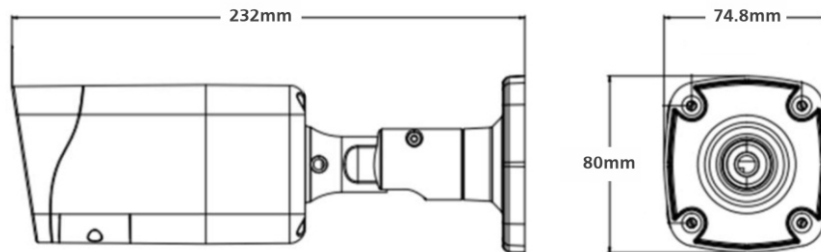

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-40R-73	2MP H.265 IR IP Bullet Camera with 2.7to 13.5mm Motorized lens, PoE, SD card Slot, WDR, Analytic feature includes face, human body, vehicle, non-motor detection and capture with 40M IR Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (Kg)	Dimension (mm)
ENC-HBU5M-40R-73	Carton Box	1.2	233x121x114

