

# 2MP H.265 IR IP BULLET CAMERA




ENC-HBU5M-50R-73

## FEATURES

1/2.8" Progressive Scan CMOS
2.7~13.5mm motorized lens
25fps/30fps@2MP
Triple streams
Support face, human body, vehicle, non-motor detection and capture
High performance, up to 300 faces, human body and 40 vehicles detection per frame
Smart IR Up to 50M
IP66



## Field Of View

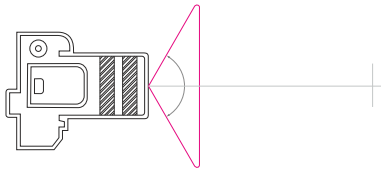

## SPECIFICATION

MODEL	Model No.	ENC-HBU5M-50R-73
CAMERA	Type	2MP H.265 IR IP Bullet Camera
	Image Sensor	1/2.8" Progressive Scan CMOS
	Lens	2.7~13.5mm Motorized zoom lens
	Iris	Fixed Iris
	Angle of View(H)	105° ~ 30°
	Shutter	1/5-1/20,000s
	Min. Illumination	Colour: 0.01Lux@F1.2, B/W: 0Lux@IR
	AGC	Auto/Manual
	Day/Night	IR-Cut filter with auto switch (ICR)
	Digital noise reduction	2D/3D DNR
	S/N	>55dB
	Smart IR	Up to 50M
	Defog	Digital Defog
	WDR	120dB
White light LED	6 pcs	
VIDEO & AUDIO	Max.Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 1920x1080/1280x720 @25/30fps Sub Stream: D1/VGA/640x360/CIF/QVGA @25/30fps Third Stream: VGA/CIF/QVGA @25/30fps
	Streaming Capability	Triple Stream
	ROI	Supported
	HLC/BLC	Supported
	Privacy Mask	Supported
	Motion Detection	Supported
	Audio Compression	G.711U/G.711A
	SMART	Behaviour Detection
Intelligent Identification		Multi Loiter, Converse, People counting
Statistical Analysis		Support alarm triggering by specified target types human and vehicle). Filtering out mistaken alarm causedby target types such as leaf, light, animal, and flag, etc
Exception detection		Detects face, human body, vehicle and non-motor automatically and capture



# 2MP H.265 IR IP BULLET CAMERA




ENC-HBU5M-50R-73

## SPECIFICATION

<b>MODEL</b>	<b>Model No.</b>	ENC-HBU5M-50R-73
	Type	2MP H.265 IR IP Bullet Camera
<b>INTERFACE</b>	Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
	Compatibility	ONVIF (Profile S/G)
	RS485	Supported
	Network	1 Ethernet (10/100 Base-T) RJ-45 Connector
	Audio I/O	1/1
<b>GENERAL</b>	Alarm I/O	1/1
	Power	DC 12V/PoE (IEEE 802.3af)
	Power consumption	<7.7W
	Edge Storage	Built-in MicroSD, Up to 128GB
	Reset Button	Supported
	Working Environment	-30°C ~ 50°C Humidity: ≤90% RH
	Ingress Protection	IP66
Dimensions	218×106×99mm	
Weight	0.74Kg	

Dimension Unit: mm

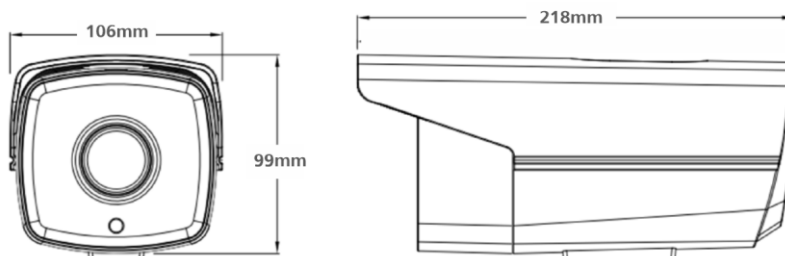

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5M-50R-73	2MP H.265 IR IP Bullet camera with 2.7to 13.5mm Motorized lens, PoE, SD card Slot, WDR, Analytic feature includes face, human body, vehicle, non-motor detection and capture with 50M IR support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (Kg)	Dimension (mm)
ENC-HBU5M-50R-73	Carton Box	1.2	233×121×114

