

# 4MP H.265 IR IP BULLET CAMERA




ENC-HBU7F-30R-68

## FEATURES

- 1/3" Progressive Scan CMOS
- 3.6mm (2.8/6mm Optional)
- 25/30fps@4MP
- Triple Streams
- Smart IR Range 30M
- Electronic Image Stabilization
- IP67



## Field Of View

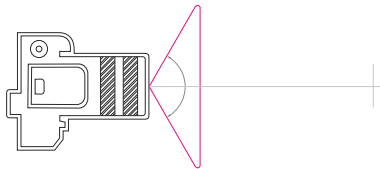

## SPECIFICATION

MODEL	Model No.	ENC-HBU7F-30R-68
CAMERA	Type	4MP H.265 IR IP Bullet Camera
	Image Sensor	1/3" Progressive Scan CMOS
	Lens	3.6mm (2.8/6mm Optional)
	Iris	Fixed Iris
	Angle of View(H)	85°
	Shutter	1/5-1/20000
	Min. illumination	Color: 0.05Lux @F1.2, B/W: 0Lux @(IR LED ON)
	AGC	Auto/ Manual
	Day/Night	ICR
	Digital Noise Reduction	2D/3D
	S/N	55dB
	Smart IR	Up to30M
	Defog	Digital Defog
	WDR	120dB
VIDEO & AUDIO	Max. Resolution	2592×1520
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream : 2592×1520/2560×1440/2304×1296/1920×1080/1280×720 @25/30fps Sub Stream : D1/VGA/640×360/CIF/QVGA @25/30fps Third Stream : VGA/CIF/QVGA @25/30fps
	Streaming Capability	Triple Stream
	ROI	Supported
	HLC/BLC	Supported
	EIS	Supported
	Motion Detection	Supported
	Privacy Masking	Supported
	Audio Compression	G.711U/G.711A
SMART	Behavior Detection	Perimeter, Single Virtual Fence, Double Virtual Fences
	Intelligent Identification	Loiter, Multi Loiter, Abandoned Object, Missing Object
	Statistical Analysis	Abnormal Speed, Converse, Illegal Parking, Signal Bad



# 4MP H.265 IR IP BULLET CAMERA



ENC-HBU7F-30R-68

## SPECIFICATION

MODEL	
Model No.	ENC-HBU7F-30R-68
Type	4MP H.265 IR IP Bullet Camera


  

INTERFACE	
Protocols	IPv4, IPv6, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTPC/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
Compatibility	ONVIF (Profile S/G)
Network	1 Ethernet (10/100 Base-T) RJ-45 Connector

GENERAL	
Power Supply	DC 12V/POE (IEEE 802.3af)
Power Consumption	7W
Working Environment	-40°C ~ 60°C, Humidity: < 90% RH
Reset Button	Supported
Ingress Protection	IP67
Dimensions	169 × 70 × 60 mm
Weight	0.63Kg

Dimension Unit: mm

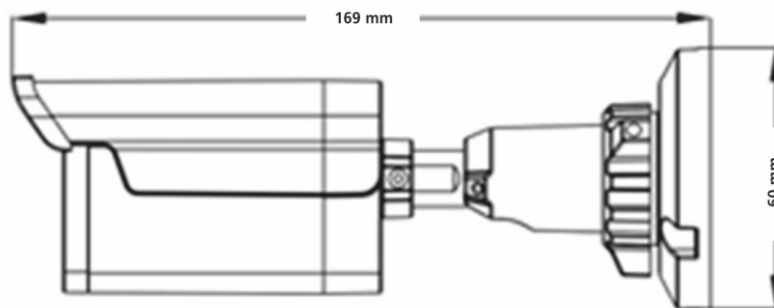

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU7F-30R-68	4MP H.265 IR IP Bullet camera with 3.6mm(optional 2.8/ 6mm) Fixed lens, POE, WDR, Analytic features and 30m IR Support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU7F-30R-68	Carton Box	0.63	169 × 70 × 63

