

# 2MP PTZ DOME CAMERA



**ENC-HHP5Z-250R-14**

## FEATURES

- \_\_\_\_\_ MoonView Series
- \_\_\_\_\_ 45X Optical Zoom
- \_\_\_\_\_ Smart IR Up to 250 m
- \_\_\_\_\_ ONVIF Profile (S,G,T)
- \_\_\_\_\_ Five Streams
- \_\_\_\_\_ Audio and Alarm Support
- \_\_\_\_\_ IP66, PoE++



## SPECIFICATION

MODEL	Model No.	ENC-HHP5Z-250R-14
	Type	2MP PTZ DOME CAMERA
CAMERA	Image Sensor	1/1.8", CMOS Progressive 2.0 MegaPixel
	Day/Night	IR-cut filter with auto switch (ICR)
	Lens	5.7 ~ 256.5mm, AF automatic focusing and motorized zoom lens
	Detection distance	76.6 m (5.7 mm Lens), 3330.6 m (256.5 mm Lens)
	Observation Distance	30.6 m (5.7 mm Lens), 1332.2 m (256.5 mm Lens)
	Recognition Distance	15.3 m (5.7 mm Lens), 666.1 m (256.5 mm Lens)
	Identification Distance	7.6 m (5.7 mm Lens), 333.1 m (256.5 mm Lens)
	Angle of View (H)	59.5° ~ 2.2°
	Angle of View (V)	35.6° ~ 1.2°
	Optical Zoom	45X
	Digital Zoom	16X
	Shutter	Auto/Manual, 1 ~ 1/100000s
	Minimum Illumination	Colour: 0.0005 lux F1.3; 0 lux with IR
	AGC	Auto / Manual
	S/N Ratio	>52 dB
	Smart IR	Up to 250 m
	Wavelength	850 nm
Defog	Digital & Optical Defog	
WDR	120 dB	

None

★Product specification and availability are subject to change without notice.

# 2MP PTZ DOME CAMERA



## ENC-HHP5Z-250R-14

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HHP5Z-250R-14</b>
	<b>Type</b>	2MP PTZ DOME CAMERA
<b>VIDEO</b>	<b>Video Compression</b>	H.265+, H.265, H.264, MJPEG
	<b>H.264 code profile</b>	Baseline profile, Main profile, High profile
	<b>Frame Rate</b>	Main Stream: 2MP (1920*1080) @ 60fps; Sub Stream: 2MP (1920*1080) @ 60fps; Third Stream: D1 (720*576) @ 60fps Fourth Stream: D1 (720*576) @ 60fps Fifth Stream: D1 (720*576) @ 60fps
	<b>Video Bit Rate</b>	128 kbps ~ 16 Mbps
	<b>OSD</b>	Up to 8 OSDs
	<b>Privacy Mask</b>	Up to 24 areas
	<b>ROI</b>	Up to 8 areas
	<b>Motion Detection</b>	Supported
	<b>White Balance</b>	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
	<b>Digital noise reduction</b>	3D DNR
	<b>Flip</b>	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
	<b>Dewarping</b>	N/A
	<b>HLC</b>	Supported
	<b>BLC</b>	Supported
<b>AUDIO</b>	<b>Audio Compression</b>	G.711U,G.711A
	<b>Two-way Audio</b>	Supported
	<b>Audio I/O</b>	1 / 1
	<b>Suppression</b>	Supported
	<b>Sampling Rate</b>	8 KHZ
	<b>Built-in Mic</b>	N/A
<b>SMART</b>	<b>Smart intrusion prevention</b>	Cross Line, Intrusion, Enter/Exit Area detection
	<b>Statistical Analysis</b>	Motion detection, Audio detection, Tampering Alarm;
	<b>General Function</b>	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
	<b>Recognition</b>	Face capture
<b>INTERFACE</b>	<b>Protocols</b>	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS
	<b>Compatibility</b>	ONVIF (Profile S,G,T), API/SDK
	<b>Web Browser</b>	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
	<b>Edge Storage</b>	Micro SD, up to 256GB
	<b>Network Storage</b>	ANR,NAS(NFS)
	<b>Network</b>	10/100M Base-TX Ethernet
	<b>Alarm I/O</b>	7 / 2
	<b>Built-in Speaker</b>	N/A
<b>PAN AND TILT</b>	<b>Pan Range</b>	360° (endless)
	<b>Pan Speed</b>	0.1°/s ~ 180°/s
	<b>Pan Preset speed</b>	300°/s
	<b>Tilt Range</b>	-15° ~ 90° (auto reverse)
	<b>Tilt Speed</b>	0.1° ~ 180°
	<b>Tilt Preset speed</b>	240°/s
	<b>Number of Presets</b>	1024
	<b>Patrol</b>	Preset patrol, route patrol, recorded patrol
<b>Patrol Stay Time</b>	15s ~ 1800s	

None

★Product specification and availability are subject to change without notice.


# 2MP PTZ DOME CAMERA



**ENC-HHP5Z-250R-14**

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HHP5Z-250R-14</b>
	<b>Type</b>	2MP PTZ DOME CAMERA
<b>GENERAL</b>	<b>Power Supply</b>	AC 24V , DC 24V, PoE++ (IEEE 802.3bt)
	<b>Power consumption</b>	Max 61W
	<b>Material</b>	Metal+Plastic
	<b>Working Environment</b>	-40°C ~ 70°C , Humidity: ≤95% RH (non-condensing)
	<b>Storage Environment</b>	-40°C ~ 70°C , Humidity: ≤95% RH (non-condensing)
	<b>Surge Protection</b>	6KV
	<b>Ingress Protection</b>	IP66
	<b>Vandal Resistant</b>	N/A
	<b>Reset Button</b>	Supported
	<b>Dimensions (Ø x H)</b>	Φ270 x 497 mm
<b>Weight</b>	10.3 Kg	

**Dimension Unit : mm**

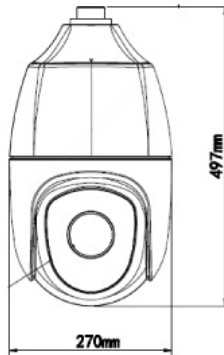

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HHP5Z-250R-14	2MP 60fps IR IP H.265 High Speed PTZ dome camera with 45X Optical zoom, PoE,WDR, Micro SD card slot, Smart analytics* and 250m IR support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HHP5Z-250R-14	Carton Box	10.3	Φ270 x 497

None

★Product specification and availability are subject to change without notice.