

5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-50R-10

FEATURES

2.8-12 mm Motorized Lens


Smart IR Up to 50 m

ONVIF Profile (S,G,T)

Triple Stream

Audio & Alarm Support

IP67, PoE

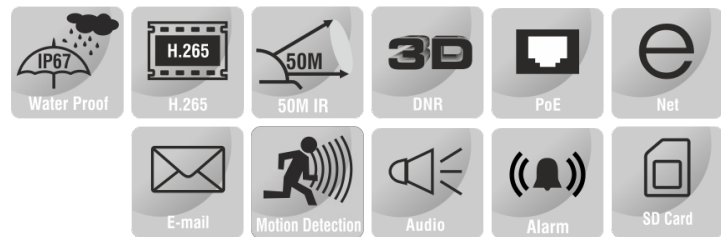

SPECIFICATION

MODEL	Model No.	ENV-HBU8M-50R-10
	Type	5MP MOTORIZED BULLET CAMERA
CAMERA	Image Sensor	1/2.7" CMOS Progressive 5.0 MegaPixel
	Day / Night	IR-cut filter with auto switch (ICR)
	Lens	2.8 ~ 12mm Motorized Lens
	Detection distance	63.1 m (2.8 mm Lens), 270.3 m (12 mm Lens)
	Observation Distance	25.2 m (2.8 mm Lens), 108.1 m (12 mm Lens)
	Recognition Distance	12.6 m (2.8 mm Lens), 54.1 m (12 mm Lens)
	Identification Distance	6.3 m (2.8 mm Lens), 27.0 m (12 mm Lens)
	Angle of View (H)	96.23° ~ 31.69°
	Angle of View (V)	69.98° ~ 24.28°
	Adjustment angle	Pan: 0° ~ 360°; Tilt: 0° ~ 90°; Rotate: 0° ~ 360°
	Shutter	Auto / Manual, 1 ~ 1/100000s
	Minimum Illumination	Colour: 0.003 lux F1.6, 0 lux with IR on
	AGC	Auto / Manual
	S/N	>56 dB
	Smart IR	Up to 50 m
	Wavelength	850 nm
	Defog	Smart Defog
WDR	120 dB	
Warm Light Range	N/A	

None

★Product specification and availability are subject to change without notice.

5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-50R-10

MODEL	Model No.	ENV-HBU8M-50R-10
	Type	5MP MOTORIZED BULLET CAMERA
VIDEO	Video Compression	H.265+, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main Profile
	Frame Rate	Main Stream: 5MP (2592*1944) @ 20fps; 4MP (2560*1440) @ 30fps; 3MP (2304*1296) @ 30fps; 1080P (1920*1080) @ 30fps; Sub Stream: 4CIF (704*576) @ 30fps; Third Stream: CIF (352*288) @ 30fps
	Video Bit Rate	128 Kbps~16 Mbps
	OSD	Up to 4 OSDs
	Privacy Mask	Up to 4 areas
	ROI	Up to 2 areas
	Motion Detection	Up to 4 areas
	Digital noise reduction	2D / 3D DNR
	De-warping	N/A
	HLC	Supported
	BLC	Supported
	Corridor Mode	N/A
AUDIO	Audio Compression	G.711
	Two-way Audio	Supported
	Suppression	Supported
	Sampling Rate	8KHZ
INTERFACE	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL
	Compatibility	ONVIF (Profile S,G,T), API
	Client	Eyenor VMS
	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
	Edge Storage	Micro SD, up to 128GB
	Network	10/100M Base-TX Ethernet
	Audio I/O	1/1
	Alarm I/O	1/1
	Network Storage	ANR
	Built-in Speaker	N/A
Built-in Mic	N/A	
GENERAL	Power Supply	DC 12V, PoE (IEEE 802.3af)
	Power Consumption	Max 9.5W
	Working Environment	-30°C ~ 60°C , Humidity: ≤95% RH (non-condensing)
	Storage Environment	-30°C ~ 60°C , Humidity: ≤95% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	N/A
	Reset Button	N/A
	Dimensions (L x W x H)	240.3 x 86.4 x 75.6 mm
Weight	1.0 kg	

None

★Product specification and availability are subject to change without notice.


5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-50R-10

MODEL	Model No.	ENV-HBU8M-50R-10
	Type	5MP MOTORIZED BULLET CAMERA

Dimension Unit : mm

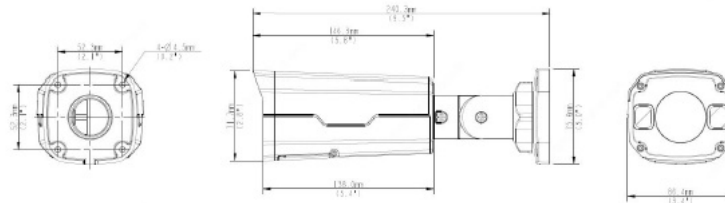

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HBU8M-50R-10	5MP IR IP H.265 Bullet Camera with 2.8 to 12mm Motorised Lens, PoE, SD Card Slot, WDR and 50m IR Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HBU8M-50R-10	Carton Box	1.0	240.3 × 86.4 × 75.6

None

★Product specification and availability are subject to change without notice.