

4MP FIXED DOME CAMERA



ENV-HDO7F-30R-15

FEATURES


2.8 mm (Optional 4mm) Fixed Lens

Smart IR upto 30 m

ONVIF Profile (S,G,T)

Built-in Mic

PoE, IP67

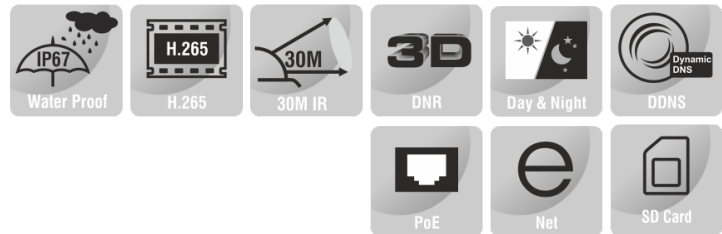

SPECIFICATION

| MODEL | Model No. | ENV-HDO7F-30R-15 |
|------------|-------------------------|--|
| | Type | 4MP FIXED DOME CAMERA |
| CAMERA | Image Sensor | 1/3" CMOS Progressive 4.0 MegaPixel |
| | Day/Night | IR Cut Filter with Auto Switch |
| | Lens Type | Fixed |
| | Focal Length | 2.8mm / 4mm |
| | Detection distance | 63 m(2.8mm Lens), 90 m(4mm Lens) |
| | Observation Distance | 25.2 m (2.8 mm Lens), 36 (4mm Lens) |
| | Recognition Distance | 12.6 m (2.8 mm Lens), 18 (4mm Lens) |
| | Identification Distance | 6.3 m (2.8 mm Lens), 9 m (4mm Lens) |
| | Angle of View (H) | 105.3° (2.8 mm) / 79.7° (4 mm) |
| | Angle of View (V) | 57° (2.8 mm) / 41.6° (4 mm) |
| | Angle Adjustment | Pan 0~360°, Tilt 0~80°, Rotate 0~360° |
| | Aperture Range | F1.6 |
| | Shutter | 1s to 1/100,000s |
| | Min. Illumination | Colour: 0.005 lux @ F1.6, B/W: 0 lux with IR |
| | AGC | Auto / Manual |
| | Digital Noise Reduction | 2D/3D DNR |
| | S/N Ratio | 52 dB |
| Defog | Smart Defog | |
| WDR | 120 dB | |
| Smart IR | Up to 30 m | |
| Wavelength | 850nm | |

None

★Product specification and availability are subject to change without notice.

4MP FIXED DOME CAMERA



ENV-HDO7F-30R-15

| | | |
|------------------|-----------------------------|---|
| MODEL | Model No. | ENV-HDO7F-30R-15 |
| | Type | 4MP FIXED DOME CAMERA |
| VIDEO | Max.Resolution | 2688x1520 |
| | Video Compression | H.265+, H.265, H.264, MJPEG |
| | Main Stream | Main Stream: 4MP (2688*1520) 4MP (2560*1440) @ 25fps; 3MP (2304*1296), 2MP (1920*1080) @ 30fps Sub Stream: 720P (1280*720) @ 25fps |
| | Video Bit Rate | 128 kbps ~ 16 Mbps |
| | Bitrate Type | CBR, VBR |
| | White Balance | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2 |
| | Flip | Normal/Vertical/Horizontal/180° |
| | HLC | Supported |
| | BLC | Supported |
| | OSD | Up to 4 OSDs |
| | ROI | Up to 4 areas |
| | Motion Detection | Up to 4 areas |
| | Privacy Mask | Up to 4 regions |
| AUDIO | Audio Compression | G.711 |
| | Suppression | Supported |
| | Sampling Rate | 8KHZ |
| | Audio I/O | N/A |
| | Built-in Mic | Supported |
| SMART | Behavior Detection | Human Body Detection |
| | Statistical Analysis | Motion detection, Tampering alarm |
| | General Function | Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, user authentication, HTTP authentication |
| INTERFACE | Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP, 802.1x |
| | Compatibility | ONVIF (Profile S,G,T), API |
| | Network | 1 RJ45 10M/100M Self Adaptive Ethernet Port |
| | Alarm Interface | N/A |
| | Edge Storage | MicroSD card slot, up to 256 GB |
| | ANR | Supported |
| GENERAL | Power Supply | DC 12V, PoE (IEEE 802.3af) |
| | Power Consumption | Max 3W |
| | Working Environment | -30°C ~ 60°C , Humidity: ≤95% RH (non-condensing) |
| | Storage Environment | -30°C ~ 60°C , Humidity: ≤95% RH (non-condensing) |
| | Ingress Protection | IP67 |
| | Vandal Resistant | N/A |
| | Surge Protection | 2KV |
| | Dimensions (mm) | Φ118 x 96 mm |
| | Weight | 0.35 Kg |

None

★Product specification and availability are subject to change without notice.


4MP FIXED DOME CAMERA



ENV-HDO7F-30R-15

| | | |
|-------|-----------|-----------------------|
| MODEL | Model No. | ENV-HDO7F-30R-15 |
| | Type | 4MP FIXED DOME CAMERA |

Dimension Unit : mm

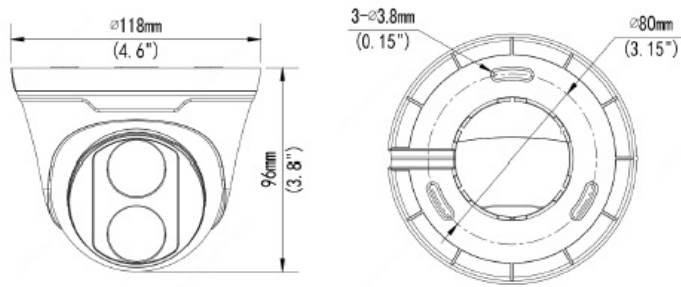

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|------------------|---|-------------------|
| ENV-HDO7F-30R-15 | 4MP IR IP H.265 Dome camera with 2.8 mm (Optional 4mm) Fixed Lens, PoE, WDR, SD card slot, Built in Mic, Smart Analytics * and 30m IR support | 1 |

PACKING INFORMATION

| Part Number | Packing Mode | Gross weight(Kg) | Dimension(mm) |
|------------------|--------------|------------------|---------------|
| ENV-HDO7F-30R-15 | Carton Box | 0.35 | 118 x118x 96 |

None

★Product specification and availability are subject to change without notice.