


# 2MP MINI PTZ DOME CAMERA



**ENC-HCP5Z-30R-19**

## FEATURES

Starlight Illumination
5X Optical Zoom
16X Digital Zoom
Smart IR up to 30 m
ONVIF Profile (S, G, T)
Triple Stream
Audio & Alarm Support
PoE+

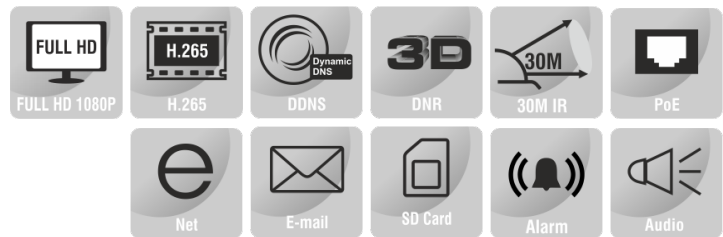

## SPECIFICATION

MODEL	Model No.	ENC-HCP5Z-30R-19
	Type	2MP MINI PTZ DOME CAMERA
CAMERA	Image Sensor	1/2.7" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized Zoom Lens
	Focal Length	2.7~13.5mm
	Focus	Auto / Semi Auto / Manual
	Iris Type	DC Auto Iris
	Angle of View (H)	106.9°~30.6°
	Angle of View (V)	56.0°~17.7°
	Optical Zoom	5X
	Digital Zoom	16X
	Shutter	1s to 1/100,000s
	Min. Illumination	Colour:0.003 lux (F1.2, AGC ON), 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	>52dB
	Defog	Digital Defog
	WDR	120 dB
	Smart IR	Up to 30 m
Laser IR	N/A	
Wavelength	850 nm	
White LEDs	N/A	

# 2MP MINI PTZ DOME CAMERA



## ENC-HCP5Z-30R-19

MODEL	Model No.	ENC-HCP5Z-30R-19
	Type	2MP MINI PTZ DOME CAMERA
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps Sub Stream: 720P (1280*720), Max 30fps; Third Stream: D1 (720*576), Max 30fps
	Video Bit Rate	128 Kbps~16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
	HLC	Supported
	BLC	Supported
	OSD	Total 8 regions
ROI	Up to 8 regions	
Privacy Mask	Up to 24 regions	
AUDIO	Audio Compression	G.711U, G.711A
	Audio Bit Rate	64 Kbps
	Audio I/O	N/A
	Two-way Audio	Supported
	Suppression	Supported
	Sampling Rate	8 kHz
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Region Entrance/Exit Detection
	Basic Detection	Motion detection, Audio detection, Tampering alarm
	Face Detection	Face Capture
	General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Audio Detection
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IGMP, ICMP, ARP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, PPPoE, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS
	Security	User Authentication, HTTPS Encryption, RTSP Authentication, Digest Authentication (RTSP/HTTP/ONVIF), TLS 1.2, WSSE (ONVIF)
	Compatibility	ONVIF Profile (S, G, T), SDK/API
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	1 Input / 1 Output
	Serial Interface	1 x RS485
	USB	N/A
	Edge Storage	Built-in MicroSD card slot, up to 256 GB
	ANR	Supported
	Built-in Speaker	Supported
	Cable Interface	Pig Tail
	User	Up to 32 users
	Web Client	EyenorVMS
	Wiper	N/A
PAN AND TILT	Pan Range	350°
	Pan Speed	Pan Manual Speed: 0.1°/s ~ 60°/s, Pan Preset Speed: 60°/s
	Tilt Range	0° ~ 90°
	Tilt Speed	Tilt Manual Speed: 0.1°/s ~ 50°/s, Tilt Preset Speed: 50°/s
	Preset Patrol	16, up to 64 presets per patrol
	Patrol Stay Time	120s ~ 1800s
	Home Position	Supported
	Number of Preset	1024


# 2MP MINI PTZ DOME CAMERA



## ENC-HCP5Z-30R-19

MODEL	Model No.	ENC-HCP5Z-30R-19
	Type	2MP MINI PTZ DOME CAMERA
GENERAL	Power Supply	12V DC, PoE+(IEEE 802.3at)
	Max. Power Consumption	Max 15W
	Working Temperature	-10 °C ~ 70 °C
	Working Humidity	0-95% RH (non-condensing)
	Ingress Protection	IP60
	Vandal Resistant	N/A
	Surge Protection	Supported
	Reset Button	Supported
	Dimensions	Φ129 x 143.6mm
	Net Weight	0.76 kg

Dimension Unit : mm

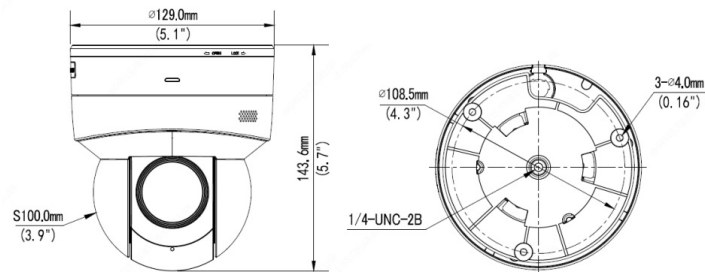

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCP5Z-30R-19	2MP IR IP H.265 Indoor Mini PTZ Dome Camera with 5X Optical Zoom, PoE, Micro SD Card Slot, WDR, Built-in Mic, Speaker and 30m IR Support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HCP5Z-30R-19	Carton Box	-	-