

12MP BOX CAMERA



ENC-HBLCO-00R-65

FEATURES

12MP Resolution
ONVIF Profile (S, G, T)
Triple Stream
Auto Back Focus
Audio and Alarm Support
PoE



SPECIFICATION

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
CAMERA	Image Sensor	1/1.7" CMOS Progressive 12.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	CS Mount
	Iris	DC Auto Iris
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.2, B/W: 0.0009 lux @ F1.2, 0 lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Zoom	16x
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	55 dB
VIDEO	Defog	Smart Defog
	WDR	120 dB
	Max. Resolution	4000x3000
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: (4000x3000) @ 20fps, (4096x2160, 3840x2160, 1920x1080, 1280x720) @ 25/30fps Sub Stream: (D1, VGA, CIF) @ 25/30fps Third Stream: (VGA, CIF, QVGA) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	10 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Daynight, Tungsten, Manual
	Corridor Mode	Supported
	BLC/HLC	Supported
OSD	Title, Week, Date, Time, Text with different colors and adaptable sizes	
ROI	Up to 8 Regions	
Privacy Mask	Up to 4 Regions	


12MP BOX CAMERA



ENC-HBLCO-00R-65

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	8 kbps , 16 kbps, 64 kbps
	Audio I/O	1/1
	Two-Way Communication	Supported
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Abnormal Speed, Wrong Way Detection, Illegal Parking, Signal Bad
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot, Scheduled / Manual Alarm
	Alarm Notifications	E-mail, HTTP, FTP, SD Card & Alarm Out (Event upload through E-mail, HTTP, FTP & SD Card)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, RTCP/RTP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, IGMP, QoS, 802.1x, SNMP, TLS/SSL
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication , HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G,T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	1 Input / 1 Output
	RS485	Supported
	CVBS Output	Supported
	Edge Storage	SD card slot, up to 256GB
	ANR	Supported
	Max User Access	32
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC/ 24V AC/ PoE (IEEE 802.3af)
	Max. Power Consumption	5 W
	Working Temperature	-20 °C ~ 50 °C
	Working Humidity	<90% RH
	Ingress Protection	IP66
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	150.2×75×69.7 mm
Net Weight	0.40 kg	

Dimension Unit : mm

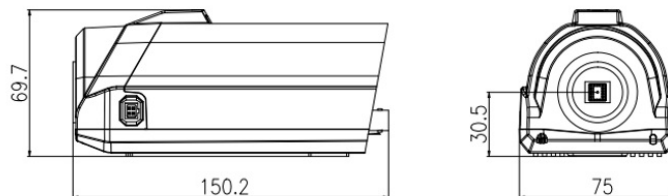

12MP BOX CAMERA



ENC-HBLCO-00R-65

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBLCO-00R-65	12MP Starlight IR IP H.265 Box Camera with CS Mount Lens Interface, Built-in Mic, WDR, PoE and SD Card Slot and Smart Analytics (without Lens)	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBLCO-00R-65	Carton Box	-	-