


3 PHASE POWER DISTRIBUTION UNIT

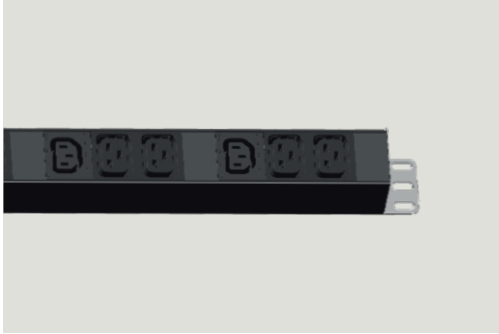

NORDEN 3 Phase Power Distribution Units are designed and manufactured in a modularized way exclusively for cabinets. The product is equipped with supply socket modules meeting different systems. The series products can be produced accordingly to customer's special requirements, the longest dimension can reach to 4600 mm.

COMPLIANCE

EMC & safety: -EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Class A, ICES-003, PSE, VCCI Class A, VDE Environmental: RoHS, REACH: Contains No SVHCs
 Socket/Outlet Standard: IEC C13/C19
 Cable plug: IEC 60309

DESIGN & MATERIALS

Material of Construction	PC/ABS alloy, High Impact flame retardant thermoplastic -UL94-V0
Shell Material & Colour	Aluminium, black
Outlet Qty.	9 way
Power Input Style	Left end single input
Phase	3 Phase
Pluge Type	IEC60309 plug (32A 3P+N+E)
Bracket Installation Style	Inverse installation
Product Size	583(L) x 56(W) x 44.4(H) mm
Control function	No controlling function
Lead length	3.0m (other cable length available on request)

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	3x32A
Voltage Rating	Input 380VAC 50/60Hz, output 230V
Max. Power	3x 8000W
Input frequency	50 or 60 Hz
Maximum load capacity	4KW
Operating Environment	-5 °C to +45 °C
Operating Relative Humidity	5 – 95 %
Operating Elevation	0-3000 meters
Storage Temperature	-25°C to +65 °C
Storage Relative Humidity	5 – 95 %
Storage Elevation	0-15000 meters

ORDERING INFORMATION

Part Number	Description
160A-409A03B062X	09 Way (C13x3+ C19x6), 32 Amp, IEC 60309 3P+N+E plug, 3 Phase PDU with 3-meter Cable Length

PACKING INFORMATION

Part Number	Packing Qty	Packing Mode	N.W (Kg)	G.W (Kg)	Dimension(mm)
160A-409A03B062X	8x1	Cartoon Mode	18.0	20	705x325x380

X:Black