

# 4X2MP MULTI-SENSOR PANORAMIC IR IP BULLET CAMERA



ENC-HBU5Q-30R-10

## FEATURES

- Four 1/2.8" 2Megapixel progressive scan CMOS
- H.265/H.264 triple-stream encoding
- Max 25fps@4096x1800
- Support 180-degree panoramic view
- Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart detection
- Intelligent Function
- Max. IR LEDs length 30M
- Micro SD memory, IP67, IK10,PoE+



## SPECIFICATION

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBU5Q-30R-10</b>	
	Type	4x2MP Multi-Sensor Panoramic IR IP Bullet Camera	
<b>CAMERA</b>	Image Sensor	Four 1/2.8" 2Megapixel progressive scan CMOS	
	Effective Pixels	4096(H)x1800(V)	
	Scanning System	Progressive	
	Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s	
	Min. Illumination	0.007Lux/F2.0( Color,1/3s,30IRE), 0.05Lux/F2.0(Color,1/30s,30IRE), 0Lux/F2.0(IR on)	
	S/N Ratio	More than 50dB	
<b>CAMERA FEATURES</b>	Max. IR LEDs Length	30M	
	Day/Night	Auto(ICR) / Color / B/W	
	BLC Mode	BLC/ HLC/DWDR	
	White Balance	Auto/Natural/Street Lamp/Outdoor/Manual	
	Gain Control	Auto/Manual	
	Noise Reduction	3D DNR	
Privacy Masking	Off / On (4 Area, Rectangle)		
<b>LENS</b>	Focal Length	3.0mm	
	Max Aperture	F2.0	
	Focus Control	Fixed	
	Angle of View	H: 180°, V:80°	
	Lens Type	Fixed	
	Mount Type	Board-in Type	
<b>AUDIO &amp; VIDEO</b>	Video Compression	H.265+/H.265/H.264+/H.264	
	Resolution	4096x1800/3840x1680/2880x1264/1920x832/1280x560/1024X452	
	Frame Rate	Main Stream	4096x1800 (1~25fps)
		Sub Stream	1024X452 (1 ~ 25/30fps)
		Third Stream	1920x832 (1 ~ 25/30fps)
	Bit Rate Control	CBR/VBR	
Bit Rate	H.265: 9Kbps~ 9472Kbps, H.264: 24Kbps~ 15616Kbps		
Audio Compression	G.711a/G.711Mu/AAC/ G.726		
Audio Interface	1/1 channel In/Out		
<b>IVS</b>	IVS	Tripwire, Intrusion, Object Abandoned/Missing	
	Advanced Intelligent Functions	Heat Map, E-PTZ	



# 4X2MP MULTI-SENSOR PANORAMIC IR IP BULLET CAMERA




ENC-HBU5Q-30R-10

## SPECIFICATION

MODEL	Model No.	ENC-HBU5Q-30R-10
	Type	4x2MP Multi-Sensor Panoramic IR IP Bullet Camera
NETWORK	Ethernet	RJ-45 (100/1000Base-T)
	Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6,SNMP, QoS, UPnP, NTP
	Interoperability	ONVIF,PSIA,CGI
	Max. User Access	10 Users/20 Users
	Smart Phone	ios, android
INTERFACE	Memory Slot	Micro SD, up to 128GB
	RS485	N/A
	Alarm In/Out	2 Ch
	PIR Sensor Range	N/A
GENERAL	Power Supply	AC24V, PoE+ (802.3at)(Class 4)
	Power Consumption	<25.5W
	Working Environment	-40° C ~ +60° C (-40° F ~ +140° F) / Less than 95% RH
	Ingress Protection	IP67
	Vandal-proof Resistance	IK10
	Dimensions	298.3×172.5×120.5mm
	Weight	3.61kg

Dimension Unit: mm

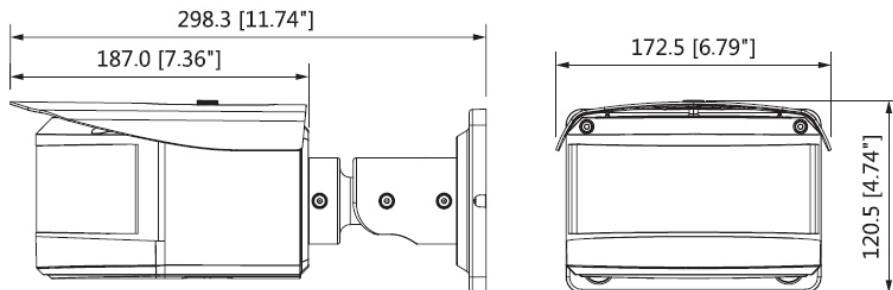

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5Q-30R-10	4x2MP Multi-Sensor Panoramic IR IP Bullet Camera with 3.0mm Fixed Lens, PoE, SD card slot, WDR and 30M IR Support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5Q-30R-10	Carton Box	3.61	298.3×172.5×120.5

