

2MP IR IP BULLET CAMERA




ENC-HBU5V-25R-56

FEATURES

- 1/2.9" Progressive Scan CMOS
- Varifocal Lens 2.8-12mm
- Full HD 1080P
- Multiple Streams
- IR Range 25M
- Low bitrate, Excellent low light performance
- 3D DNR, dWDR, ICR
- Support ROI, Corridor mode, HLC



Field Of View

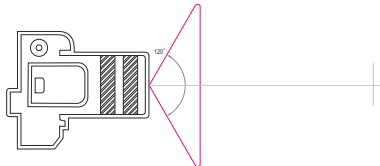

SPECIFICATION

MODEL	Model No.	ENC-HBU5V-25R-56
	Type	2MP IR IP Bullet Camera
CAMERA	Image Sensor	1/2.9" Progressive Scan CMOS
	Min. illumination	Color 0.01Lux(AGC ON);IR ON 0 Lux
	Day/Night	ICR
	Shutter Speed	1/5-1/20000
	Auto Iris	Default Fixed, Auto Iris Optional
	Wide Dynamic Range	dWDR
	Digital Noise Reduction	2D/3D
	Lens	2.8-12mm (Varifocal)
	FOV	90°~35°
	IR LED	10pcs
IR Range	25M	
IMAGE	Video Compression	H.264 High/Main/Baseline Profile, MJPEG
	Bit Rate (CBR/VBR)	Main stream: 500kb-12000kb ; Sub stream: 100kb-6000kb
	Audio Compression	G.711, RAW_PCM
	Max. Resolution	1920x1080/30fps
	Stream	Stream1: 1920x1080/1280x720; Stream 2: D1 to QVGA
	Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
	HLC	Yes
	9:16 Corridor mode	Yes
	ROI	Yes
	Defog	Yes



2MP IR IP BULLET CAMERA




ENC-HBU5V-25R-56

SPECIFICATION

MODEL	Model No.	ENC-HBU5V-25R-56
	Type	2MP IR IP Bullet Camera
NETWORK	Network Protocols:	HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, RTSP, RTCP, DNS, DDNS, SMTP, Unicast and Multicast Supported.
	Alarm Trigger	Motion Detection, Network disconnect, Disk alarm
	RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
	Security	User security authentication, Reset, Hardware WatchDog
	Web Language	English, Polish, Italian, Portuguese, Spanish
	System Compatibility	Onvif, CGI
INTERFACE	Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
	Audio I/O	Optional 1ch Audio In, 1ch Audio Out
	Alarm I/O	N/A
	RS485	N/A
	BNC Output	Yes
	Reset Button	Yes
GENERAL	Edge Storage	Micro SD/SDHC Slot, Max 32GB
	Power Supply	DC 12V/PoE
	Power Consumption	5W(IR LED OFF); 7W (IR LED ON)
	Operating Temperature	Working Temperature:-40°C ~ 60°C (-40°F ~ 140°F)
	Operating Humidity	0% - 90% RH
	Ingress Protection	IP66
	Dimensions	264.5x80.3x80.3mm
	Weight	0.75Kg

Dimension Unit: mm

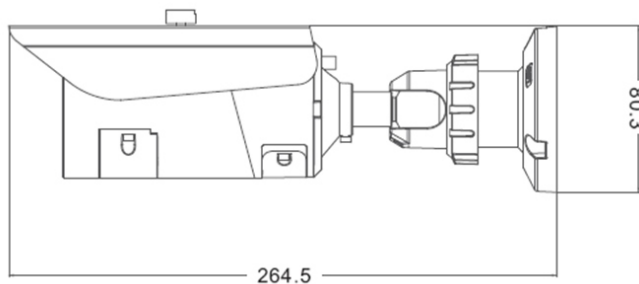

Ordering Information

Part Number	Description	Standard Quantity
ENC-HBU5V-25R-56	2MP IR IP Bullet Camera with 2.8 to 12mm Varifocal lens, PoE, SD card slot and 25M IR Support	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENC-HBU5V-25R-56	Carton Box	0.75	80.3x80.3x264.5

