


2MP IR IP H.265 PTZ DOME CAMERA



ENV-HPT5Z-150R-15

FEATURES

- 2MP HD, 20X Optical Zoom& Auto Focus
- H.265/H.264/M-JPEG, Support Multiple Code Stream
- Triple streams,
- Smart IR, up to 150M IR distance
- 6 KV surge protection
- Support DEFOG, Suitable for Working under Fog, Haze, Rain and Other Adverse Weather Condition
- Support Onvif 2.4
- Support IR 150M

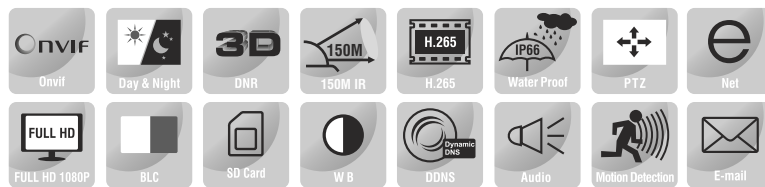

SPECIFICATION

MODEL	Model No.	ENV-HPT5Z-150R-15	
CAMERA	Type	2MP IR IP H.265 PTZ Camera	
	Image sensor	1/3" Progressive Scan CMOS	
	Resolution	Main Stream	1920*1080, 1-25(30)FPS 1280*720, 1-25(30)FPS
		Sub Stream	704*576, 1-25(30)FPS; 640*480, 1-25(30)FPS
	Focus Length	5.2 ~ 104 mm (20x optical zoom)	
	View Angle	Horizontal: 61.9°(wide)- 3.4°(tele)	
	Min. Illumination	Color 0.03Lux@F1.5, B/W 0Lux(IR ON)	
	Electronic Shutter	1/6 ~ 1/100000	
	Day & Night Mode	ICR Cut Filter, Manual, Auto, Timing, Alarm Switch	
	Focus/ Zoom	Auto Focus(AF), Zoom Trigger AF(ZF), Manual Focus(MF)	
	WDR	Digital	
	Exposure Control	Auto, Manual, Priority(Shutter or Max AGC), Brightness, etc	
	Digital Zoom	Support	
	DEFOG	Support	
	Privacy Masking	Up to 8 areas	
	HLC	Support Electronic Shutter, Gain Control and High Light Control	
	DNR	3D	
S/N Ratio	>52dB		
COMPRESSION	Video Standard	H.265/ H.264/ Motion JPEG	
	Audio Standard	G.711/G.726	
	Two Way Audio	Yes	
	Smart Function	Intrusion, crossing line, motion detection, People counting, Face detection	
Image Setting	Adjustable Image Format, Standard, Code Rate, Brightness, Contrast, Saturation, Sharpness, White Balance, Image Flip and Mirror(Passage Mode)		



2MP IR IP H.265 PTZ DOME CAMERA




ENV-HPT5Z-150R-15

SPECIFICATION

MODEL	Model No.	ENV-HPT5Z-150R-15
	Type	2MP IR IP H.265 PTZ Camera
NETWORK	Interface Protocol	RJ45 10Base-T/100Base-TX
	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, L2TP, SMTP, 802.1x
	Compatibility	ONVIF, API
INTERFACE	Audio In/Out	1/1
	Alarm In/Out	1/1
	Edge Storage	Support Up to 128GB
PTZ	Rotation Range	Pan 0° to 360°, Tilt -15° to 90° Automatic
	Rotation Speed	Pan Speed : 0.1°/s ~ 240°/s, Pan Preset Speed : 300°/s Tilt Speed : 0.1°/s ~ 160°/s, Tilt Preset Speed : 240°/s
	Preset	256
	Patrol	Up to 16 Patrol, 32 Presets per Patrol
	Pattern	16
	Power-off Memory	Recover to the PTZ and Lens previous state when restart
	IR Distance	IR 150M
GENERAL	Working Conditions	-40°C ~ +65°C (Outdoor), Relative Humidity ≤95% (non-condensing)
	Power Supply	24 V AC, 24 V DC
	Protection Level	Ip66, All-weather Protective Cover, Built-in Fans& Thermostat, 6000V Lighting& Surge Protection
	Dimension (mm)	Φ227x359.4mm
	Weight	5.28kg (With Bracket)

Dimension Unit: mm

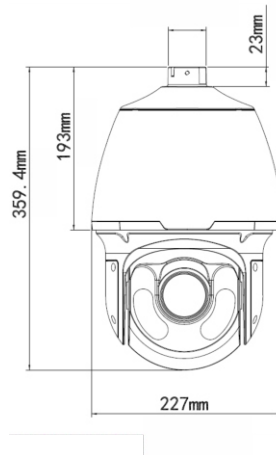

Ordering Information

Part Number	Description	Standard Quantity
ENV-HPT5Z-150R-15	2MP IR IP H.265 PTZ dome camera with 20X Optical zoom, Micro SD card slot, Smart analytics and 150M IR support	1

Packing Information

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HPT5Z-150R-15	Carton Box	5.28	227x227x359.4

