

SOUNDPROOF CABINET - FLOOR STANDING




Norden soundproof cabinets are designed for all office environments, ideal for any working environment where noise from active IT equipment is distracting or invasive. Smart design and professional engineering provide easy installation and maintenance. Comply with ANSI/EIARS-310-D, IEC 297-2, DIN 41491, PART 1, DIN 41497, PART 7, GB/T3047.2-92, and ETSI standards.

FEATURES

- 19" installation
- Adjustable feet and heavy-duty castors
- Cable entry through the bottom and top panel
- Noise reduction (dB(A)) from 30dB to 60dB
- Good Noise reduction
- Non-detachable side panel, (lock optional)
- 4x position-adjustable 19" mounting rail

Material	SPCC cold rolled steel
Deg. of Protection	IP 20
Soundproof Material	soundproof cotton (Fire Retardant, Waterproof and Moisture-Proof & Environmental protection and healthy)
Soundproof Material Thickness	2.0 mm
Noise reduction dB(A)	30dB to 60dB
Cable Entry	Top - 1*400x50mm rectangle cable entrance (optional) Bottom - 2*60mm round rubber cable entrance
Surface Finish	Degrease, acid pickling, rust prevention, and Parkerizing, pure water cleaning, static electricity powder coating
Material Thickness	Mounting profile:2.0mm, others: 1.20mm to 1.50mm
Loading Capacity	600-800KGS
Colour	RAL9004(Black);RAL7035(Grey),etc

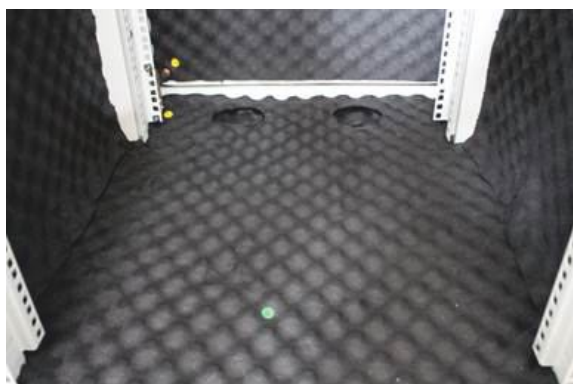

SOUNDPROOF CABINET - FLOOR STANDING

ACCESSORIES

NO	Item	600 wide	800 wide	Materials	Treatment	Note
1	Frame	2	2	1.5mm SPCC steel	Powder coating	
2	Front Door	1	1	5.0 mm glass	\	Solid frame
3	Side Panels	2	2	1.0mm SPCC steel	Powder coating	Non-detachable
4	Back Door	1	1	1.2mm SPCC steel	Powder coating	Solid
5	Lock	2	2	\	\	Handle Lock
6	Top cover	1	1	1.2mm SPCC steel	Powder coating	
7	Cotton	5	5	2.0mm soundproof cotton	\	
8	Fan unit	1	1	1.2mm SPCC steel	Powder coating	
9	Ac fan	2 or 4	2 or 4	\	\	D>800,4 pcs
10	Bottom panel	1	1	SPCC T=1.2	Powder coating	Optional parts
11	Earthing bolts	1	1	SPCC T=1.5	\	25 cm
12	Castor's tray	4	4	SPCC T=2.5	Powder coating	
13	Castors	4	4	\	\	
14	Adjustable feet	4	4	Steel	Brass plated	M12
15	Mounting angle	2	2	SPCC T=1.5	Powder coating	
16	19inch rails	4	4	SPCC T=2.0	Powder coating	
17	Cable management	\	2	SPCC T=1.2	Powder coating	800W only

ORDERING INFORMATION

Part Number	Description	Capacity (U)	Dimension(mm)
600 X 600			
30A3-126610X	12U 600 X 600 Front Glass Door Floor Standing Soundproof Cabinet	12	600 x 600 x 635
30A3-156610X	15U 600 X 600 Front Glass Door Floor Standing Soundproof Cabinet	15	600 x 600 x 769
30A3-276612X	27U 600 X 600 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	27	600 x 600 x 1388
30A3-326612X	32U 600 X 600 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	32	600 X 600 X 1610
800 X 800			
30A3-278812X	27U 800 X 800 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	27	800 X 800 X 1388
30A3-328812X	32U 800 X 800 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	32	800 X 800 X 1610
800 X 1000			
30A3-248112X	24U 800 X 1000 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	24	800 x 1000 x 1300
30A3-328112X	32U 800 X 1000 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	32	800 X 1000 X 1610
30A3-428112X	42U 800 X 1000 Front Glass Door/ Back Metal Door Floor Standing Soundproof Cabinet	42	800 X 1000 X 2055