

IR ILLUMINATOR WITH IK10



ENI-G SERIES IR ILLUMINATOR

FEATURES

- 12 pieces high power LED
- Lighter and thinner construction
- Illumination: 0 lux @ high sensitivity
- Indoor and outdoor compatible
- Boost camera performance at night for sharp images
- Excellent luminous efficiency and more consistent illumination
- Manually adjust the light sensor's power and sensitivity
- Low electrical power consumption circuit
- IP66, IK10



SPECIFICATION

MODEL	Model No.	ENI-G SERIES IR ILLUMINATOR
	Type	IR ILLUMINATOR WITH IK10
GENERAL	Beam Angle	15° ~ 120°
	Beam IR Distance	150 m ~ 30 m (850nm)
	Day & Night	Auto / Manual
	Color	Black
	LED	12 pcs LED
	Wavelength	850nm
	Power Supply	12V DC
	Power Consumption	18W
	Working Temperature	-30 °C ~ 55 °C
	Ingress Protection	IP66
	Vandal Resistant	IK10
	Bracket	Wall Mount
Material	Aluminium alloy	
Dimensions	156 x 96 x 60 mm	
Net Weight	0.82 kg	
INSTALLATION	Power	The power and LED panel wires must both be pointing downward to prevent water incursion
	Earthing	Lighting safety precautions must be taken and power wires must be grounded
	Settings	Modify the bolt of brightness, sensor and time, gently
	Installation	Professional electricians or quality technicians should install and adjust
	Caution	Do not open the case and remove the power supply


★Product specification and availability are subject to change without notice.

IR ILLUMINATOR WITH IK10



ENI-G SERIES IR ILLUMINATOR

Dimension Unit : mm

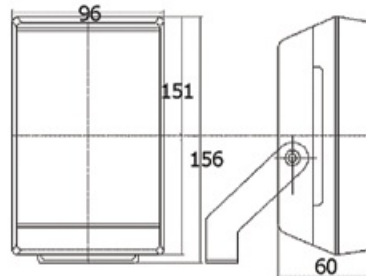

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENI-GSA015-150R	IR illuminator with 12 pieces high power IR LED, 15° Beam Angle, 150m IR , IP66 and IK10 Support	1
ENI-GSA030-100R	IR illuminator with 12 pieces high power IR LED, 30° Beam Angle, 100m IR , IP66 and IK10 Support	1
ENI-GSA045-070R	IR illuminator with 12 pieces high power IR LED, 45° Beam Angle, 70m IR , IP66 and IK10 Support	1
ENI-GSA060-050R	IR illuminator with 12 pieces high power IR LED, 60° Beam Angle, 50m IR , IP66 and IK10 Support	1
ENI-GSA090-040R	IR illuminator with 12 pieces high power IR LED, 90° Beam Angle, 40m IR , IP66 and IK10 Support	1
ENI-GSA120-030R	IR illuminator with 12 pieces high power IR LED, 120° Beam Angle, 30m IR , IP66 and IK10 Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENI-GSA015-150R	Carton Box	1.1kg	185x155x110mm
ENI-GSA030-100R	Carton Box	1.1kg	185x155x110mm
ENI-GSA045-070R	Carton Box	1.1kg	185x155x110mm
ENI-GSA060-050R	Carton Box	1.1kg	185x155x110mm
ENI-GSA090-040R	Carton Box	1.1kg	185x155x110mm
ENI-GSA120-030R	Carton Box	1.1kg	185x155x110mm

★Product specification and availability are subject to change without notice.