

## HYBRID HIGH-DENSITY MODULAR FIXED PANEL

Norden Hybrid High-Density Modular Fixed Panel accepts up to 4 HD Modules or HD Pass Through adapter plates for a total of 96FO with LC configuration. Modular panel for multi-application with MTP/MPO System, Pre-terminated cables, or conventional splicing. Easy front access with cable management bar which provides protection of the patch cords.



### FEATURES

- 4 Slots HD in 1U
- Support Up to 96FO in LC
- Support Modular with MTP/MPO Module or Adapter Plate
- Adapts with multiple Modules & Adaptor Plates

### APPLICATIONS

- Datacenter, Enterprise network & Indoor applications
- Accepts Indoor and Outdoor Pre-terminated cables
- MTP/MPO trunks and Splicing

### DESIGN & MATERIALS

Mounting Type	Rack mount (1U)
Panel Colour	Black
Panel Housing Material	SPCC
IP Rating	IP 20
Access Type	Front & Rear
Cable Entry	Rear
Slot Types	Modules & Adaptor Plates
Number of Slots	4
Operating Temperature	-20°C ~ +70°C


### ORDERING INFORMATION

#### Panel

Part Number	Description
NC02-6MRX	Hybrid High-Density Modular Fixed Panel Unloaded -1U -96F
NC02-BK3T000X	Hybrid High-Density Modular Fixed Panel Blank Plate

# HYBRID HIGH-DENSITY MODULAR FIXED PANEL

## Modules & Adaptor Plates

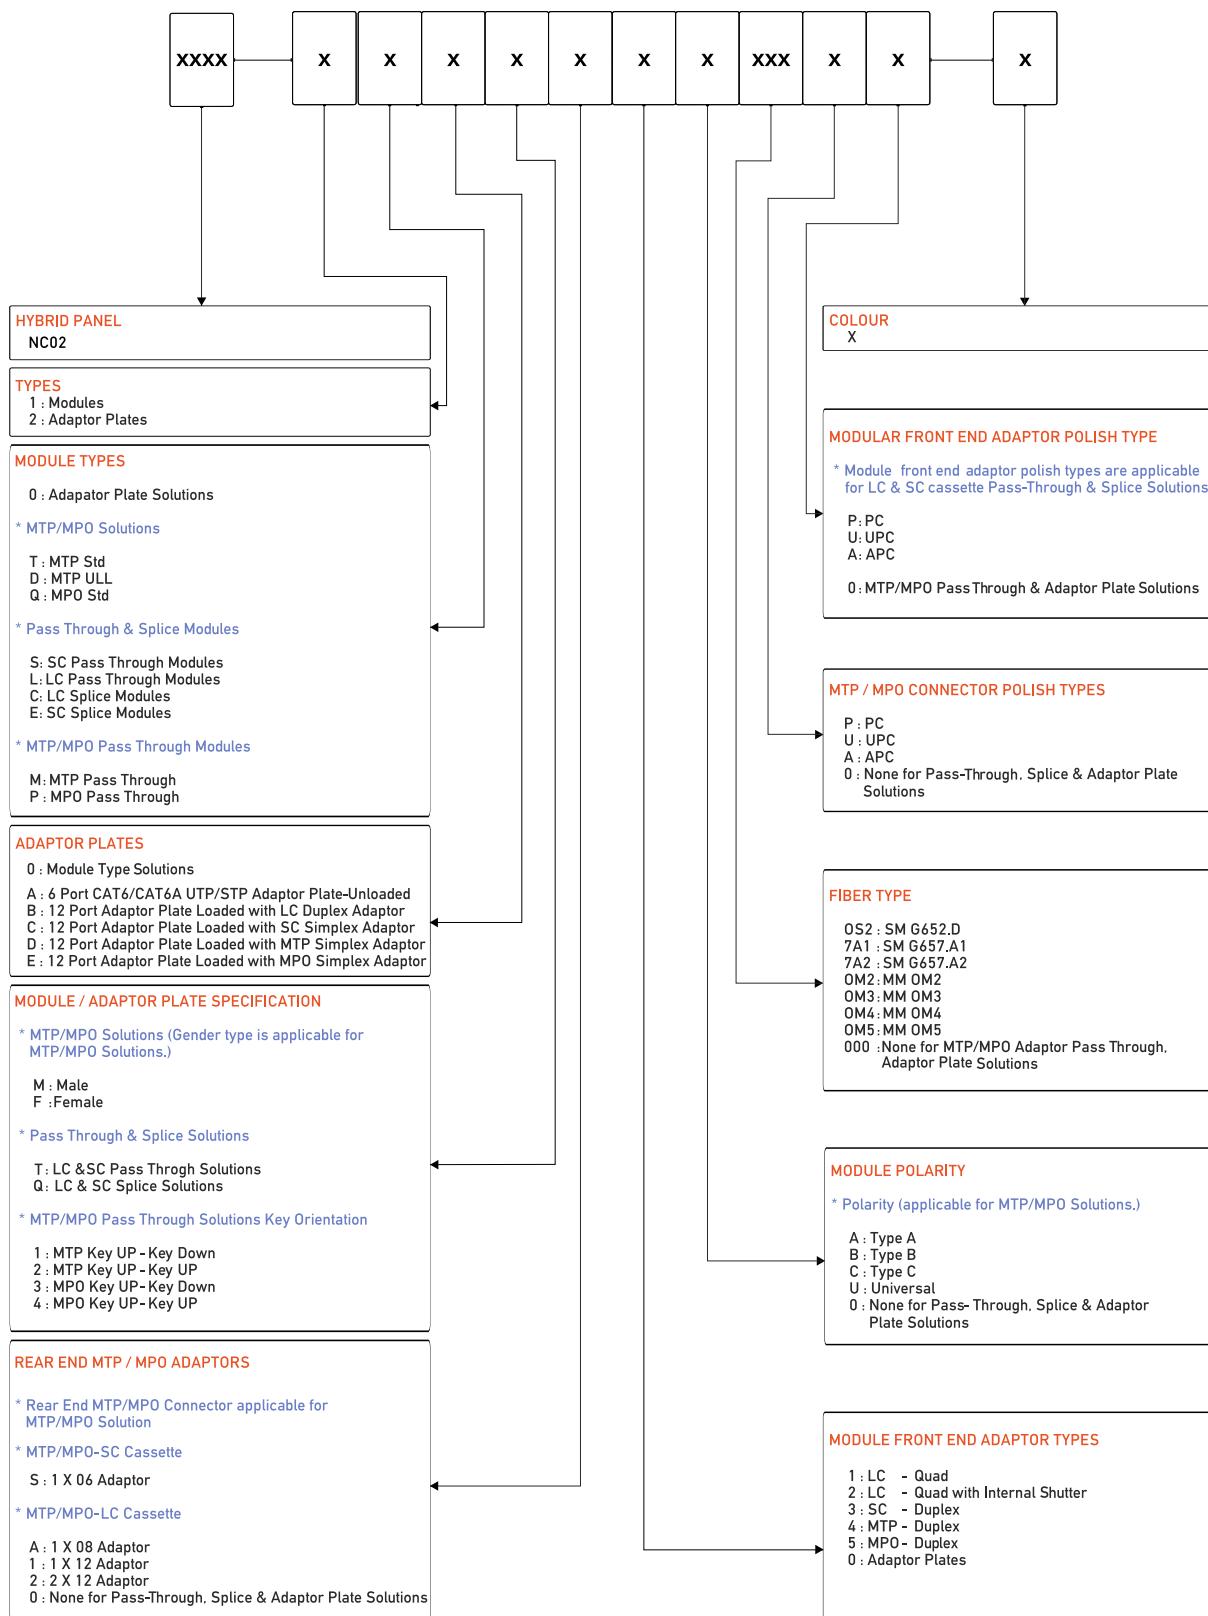

\*This Cassette Support LC Quad, SC Duplex & MTP/MPO Duplex Adaptors

## HYBRID HIGH-DENSITY MODULAR FIXED PANEL

### For Example:

#### \* Modular MTP/MPO Loaded Cassette

NC02 1 T 0 F 2 1 B OM4 P P X

Description : 2 X MTP12 /PC Standard Loss, Female, 06 X LC/PC Quad , 24F,MM OM4, Polarity B, Loaded Module

#### \* MTP/MPO Loaded Adaptor Plate

NC02 2 0 D 1 0 0 0 000 0 0 X

Description : 12 Port MTP Simplex Key Up - Key Down, Loaded Adaptor Plate

#### \* CAT6/CAT6A Unloaded Adaptor Plate

NC02 2 0 A 0 0 0 0 000 0 0 X

Description : 6 Port Unshielded/Sheilded Cat6/CatA Unloaded Adaptor Plate

#### \* LC Loaded Splice Module :

NC02 1 C 0 Q 0 1 0 OS2 0 U X

Description : SM OS2 LC Splice Module Loaded with 6 X LC/UPC Quad Adaptor and Pigtailes

#### \* LC Loaded Splice Module :

NC02 1 C 0 Q 0 2 0 OS2 0 U X

Description : SM OS2 LC Splice Module Loaded with 6 X LC/UPC Quad Adaptor with Internal Shutter and Pigtailes