

Wall Mount Fireproof Outdoor Projection Speaker 24W



DESCRIPTION

The NVS-11360024PS is a Wall Mount Fireproof Outdoor Projection Speaker, delivering powerful 24W – 12W – 6W audio options for flexible performance. Its durable ABS V0 plastic body and aluminum protection grid ensure reliable use in both indoor and outdoor settings, with an IP66 rating for added protection. The speaker features a wide band bi-cone 5" speaker and audio transformer for clear sound and easy connection to 100V or 70V lines. Additionally, the thermal fuse safeguards against overheating, while the dual IN-OUT ceramic connector, aluminum fixing bracket, waterproof cover, and IN-OUT cable glands simplify installation and daisy-chaining of multiple speakers.


FEATURES

- ◉ Clear and sonorous sound
- ◉ Wide band bi-cone 5" speaker
- ◉ IP66 waterproof level
- ◉ ABS V0 plastic body
- ◉ Aluminum protection grid
- ◉ Power taps for 24W/12W/6W

Specifications	
Model	NVS-11360024PS
Driver Size	5"x1"
Rated Power	24W
Frequency Response (-10dB)	110Hz - 18kHz
Sensitivity (1m, 1W)	86.3 dB
Maximum SPL(1m)	100.3 dB
Power Tapping Options	24W/12W/6W
Nominal Impedance @ 1KHz	416.6Ω(24W) – 833.3Ω(12W) – 1.66kΩ(6W)
Coverage Angle (-6dB)	360° (500 Hz), 262° (1 kHz), 131° (2 kHz), 82.3° (4 kHz) 61.5° (8 kHz)
Directivity Index (dB)	1.4 (500 Hz), 3.7 (1 kHz), 5.1 (2 kHz), 7.1 (4 kHz) 8.5 (8 kHz)
Directivity Factor	1.4 (500 Hz), 2.4 (1 kHz), 3.3 (2 kHz), 5.2 (4 kHz) 7.0 (8 kHz)
Weight	1.4 Kg
Aluminium Bracket	Ø140mm - 152mm
Dimension	Ø140mm - 240mm

Wall Mount Fireproof Outdoor Projection Speaker 24W

CONNECTION DIAGRAM

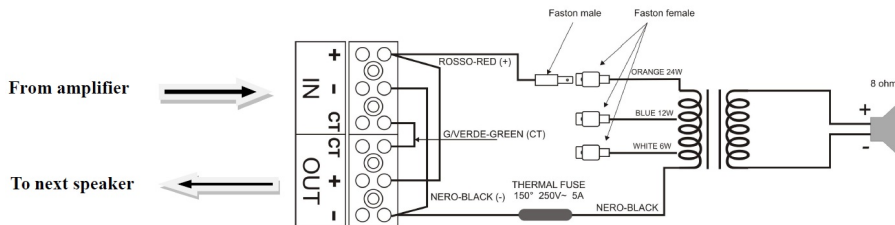

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-11360024PS	Wall Mount Fireproof Outdoor Projection Speaker 24W	01