


# 8MP MULTI SENSOR BULLET CAMERA



## ENC-HBUAD-30R-69

### FEATURES

2.8 mm Fixed Lens
Smart IR up to 30 m
ONVIF Profile (S, G, T, M)
Built-in Mic & Speaker
Audio and Alarm Support
PoE

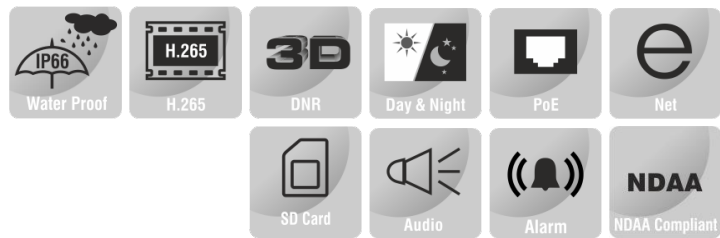

### SPECIFICATION

MODEL	Model No.	ENC-HBUAD-30R-69
	Type	8MP MULTI SENSOR BULLET CAMERA
CAMERA	Image Sensor	2x 1/2.8" CMOS Progressive Scan
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	2.8 mm
	Digital Zoom	16x
	Focus	Fixed
	Iris	Fixed Iris
	Angle of View (H)	180°
	Angle of View (V)	63°
	Angle of View (D)	190°
	Angle Adjustment	Bracket; Pan 0~360°, Tilt 0~90°, Rotate 0~360°
	Aperture	F1.6
	Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0.0001 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 30 m	
Warm Light	Up to 20 m	
Wavelength	850 nm	

# 8MP MULTI SENSOR BULLET CAMERA



## ENC-HBUAD-30R-69

MODEL	Model No.	ENC-HBUAD-30R-69
	Type	8MP MULTI SENSOR BULLET CAMERA
VIDEO	Max. Resolution	4608x1728
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Splicing Mode : Main Stream: (4608x1728) @ 15fps Second Stream: (1536x576) @ 15fps Multi Channel Mode : Main Stream: (2592x1944, 2592x1520, 1280x720) @ 15fps Second Stream: (D1, VGA, CIF, QVGA) @ 15fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate,EIS
	Video Bit Rate	Splicing mode : 200 kbps ~ 16 Mbps Multi-Channel mode : 100Kbps ~ 12Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	Mirror	Supported
	White Balance	Auto, Day/Night, Tungsten, Manual
	HLC	Supported
	BLC	Supported
	OSD	Total 8 Regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes
	ROI	Total 8 Regions
	Privacy Mask	Total 4 Regions
AUDIO	Audio Compression	G.711 U, G.711A, RAW_PCM
	Audio Bit Rate	8 kbps ~ 64 kbps
	Audio I/O	1/1
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	People Counting, Illegal Parking, Heat Map
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
INTERFACE	Alarm Notifications	E-mail, HTTP, FTP, SD Card & Alarm Out (Event Notification/ Recording/ Snapshot upload through E-mail, HTTP, FTP & SD Card)
	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, Telnet, SSL/TLS1.2
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	1/1
	Edge Storage	SD card slot, up to 256GB
	Built-in Speaker	Supported
	ANR	Supported
	Max. User	10
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC , PoE (IEEE 802.3af)
	Max. Power Consumption	11.5 W
	Working Temperature	-30 °C ~ 60 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP66
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	227.7 × 110 × 80 mm
Net Weight	0.82 Kg	


# 8MP MULTI SENSOR BULLET CAMERA



## ENC-HBUAD-30R-69

MODEL	Model No.	ENC-HBUAD-30R-69
	Type	8MP MULTI SENSOR BULLET CAMERA

Dimension Unit : mm

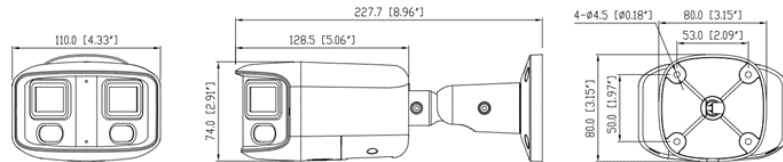

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBUAD-30R-69	8MP (5MP*2) IR IP H.265 Multi Sensor Bullet Camera with 180° Panoramic view, PoE, SD Card Slot, Built in Mic, Built in Speaker, 20M Warm Light and 30M IR Support	1
ENB-BCUJ67	Junction Box for Eyenor Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Eyenor Bullet / Box Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBUAD-30R-69	Carton Box	-	-