
1 Pair 22 AWG Overall Foil & Braid Shielded Paired Cable RS 485



The Overall braid shielded paired cable from NORDEN is suitable to use with in Audio, Control and Instrumentation purpose. The cable is constructed with foamed PE Insulation, 100% Aluminium Foil-Polyester Tape Overall Shielded with Tinned braid Coverage. This Cable is protected by PVC outer Jacket.

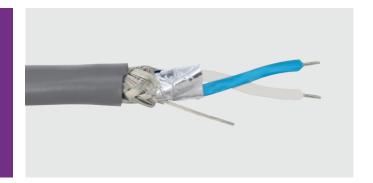

CABLE CONSTRUCTION

Conductor

Foil Coverage

Outer Jacket

Tinned Copper

100%

Insulation Foamed Polyethylene **Braid Shield** 65% Tinned Copper Jacket Color Grey

Shielding

Aluminium Foil -Polyester Tape

Drain Wire Tinned Copper LSZH Standard Compliance

IEC 60332-1& 2 (Fire flame test) IEC 60754-1 (Emission of Halogen)


IEC 60754-2 (Corrosivity) IEC 61034-1 (Emission of Smoke) ISO4589-2 (Oxygen Index LOI)

PHYSICAL CHARACTERISTICS

Characteristic	Value	
No. of Pair	1	
Conductor Size	22 AWG, 7 x 0.25 mm	
Insulation Diameter	2.13 mm	
Drain Wire Size	22 AWG, 7 x 0.25 mm	
Jacket Thickness	1.0 mm	
Jacket Diameter	7.1 mm	
Max. Recommended Pulling Tension	266.8 N	
Min. Bending Radius Minor Axis	71 mm	
Operating Temperature	-20°C to +60°C	

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Nom. Characteristic Impedance	Ω	120.0
Nom. Capacitance Cond. to Cond.	pf/m	36.09
Max. Conductor DCR @ 25°C	Ω/km	48.2
Nom. Capacitance Cond. to Cond. & Shield	pf/m	68.5
Max. Recommended Current @ 25°C	Amps	2.7
Max. Operating Voltage UL	V Rms	300

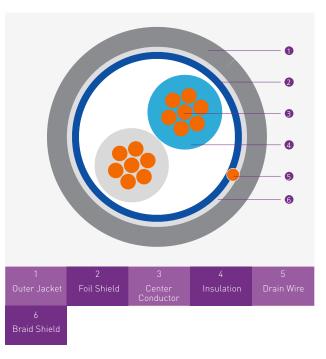

1 Pair 22 AWG Overall Foil & Braid **Shielded Paired Cable RS 485**



MECHANICAL CHARACTERISTICS

Characteristic	Value	
Test Material	PVC	
Before Tensile Strength (Mpa)	≥13.8	
Aging Elongation (%)	≥100	
After Tensile Strength (Mpa)	≥10.35	
Aging Elongation (%)	≥75	
Cold Bend (-20±°C x 4 hrs)	No Crack	

INSULATION COLOUR CODE

Individual Pair	Colour
Pair 1	White/Blue

ORDERING INFORMATION

Part Number	Description	Net Weight (Kg/Km)
78-3501221	1 Pair 22 AWG Overall Foil & Braid Shielded Paired Cable Rs485, PVC	65.48
78-3501222	1 Pair 22 AWG Overall Foil & Braid Shielded Paired Cable Rs485, LSZH	67.48