

FIBRE OPTIC CROSS CONNECTION CABINET 576 PORT

Fibre optic cross connection cabinet is an external optical equipment that is especially designed for external optical nodes in access net work.



FEATURES

- High intensity and anti-erosion performance
- Able to counter abrupt climate change and extreme environment
- Capacity can be flexibly customized as required
- Installation is quick and convenient
- Built-in direct splice unit is capable for providing direct connection function.
- Perfect design of fibre wiring routing could facilitate management and maintenance of fibres
- With secure and reliable fastening and grounding protection devices for the optic fibre
- Applicable to strap-shaped and non-strap shaped fibres
- 4 space for box type splitter

MATERIAL


Cold roll steel material

TECHNICAL PARAMETERS:

Nominal work wave-length	850nm, 1310nm, 1550nm
Protection level	IP65
Work Temperature	-45°C +85°C
Storage temperature	-100°C+85°C
Relative humidity	≤85% (+30°C)
Atmospheric pressure	70~106 Kpa
Insertion loss	≤0.2dB
Return loss	≥45dB (PC),55dB(UPC),60dB(APC)
Isolation resistance(between frame and protection grounding)	> 1000 MΩ/500V(DC)

FIBRE OPTIC CROSS CONNECTION CABINET 576 PORT

DRAWINGS

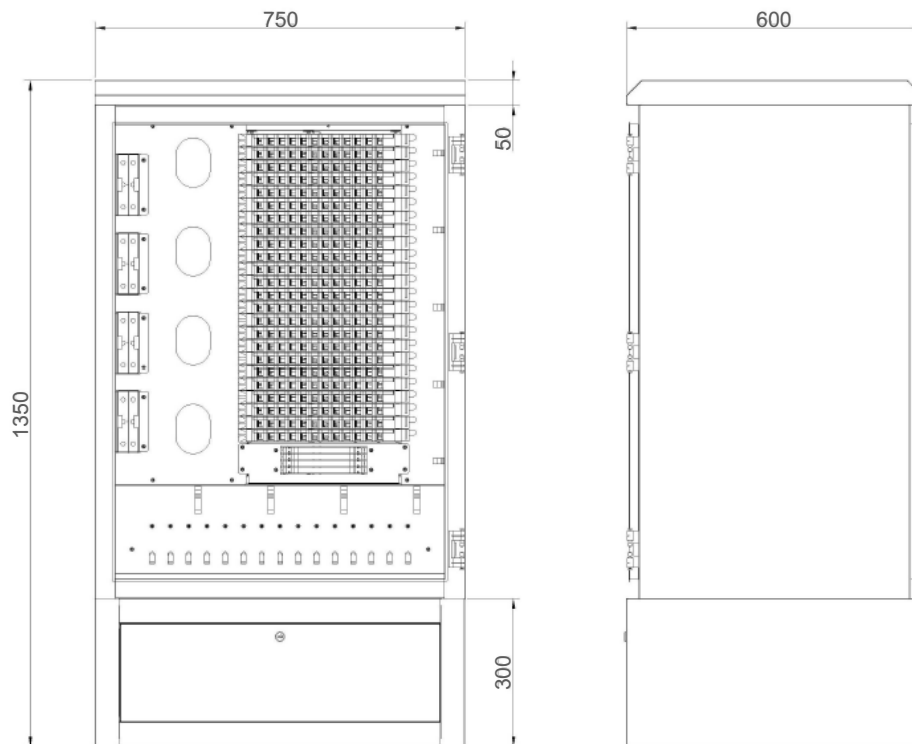

ORDERING INFORMATION

Part Number	Description	Dimension (mm)
600-576LCX	Fibre Optic Cross Connect Cabinet 576 LC Port	1350 x 750 x 600
600-576SCX	Fibre Optic Cross Connect Cabinet 576 SC Port	1350 x 750 x 600
600-576STX	Fibre Optic Cross Connect Cabinet 576 ST Port	1350 x 750 x 600

PACKING INFORMATION

Part Number	Fibre Quantity	Packing Mode	N.W (kg)	G.W(kg)
600-576LCX	576	Wooden Carton	60	70
600-576SCX	576	Wooden Carton	60	70
600-576STX	576	Wooden Carton	60	70