
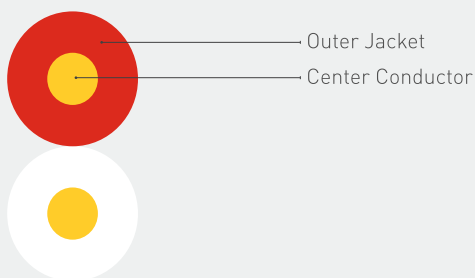


## JUMPER WIRE

Norden Jumper Wire, manufactured in accordance to BT spec CW 1423. The cables are primarily used for jumpering or hook up on distribution frames and also as a general equipment wire in exchange equipments and cabinets.

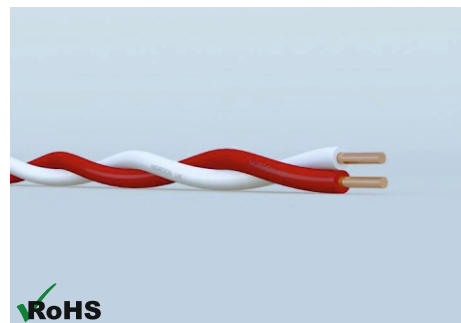

### CABLE STANDARD

CW 1423 TELEPHONE JUMPER WIRE

### CABLE PROPERTIES

Conductor	Solid Bare Copper
Insulation	PVC (Polyvinyl Chloride)
Nom. Conductor Diameter	0.5 mm
Conductor Size	24 AWG
Nom. Insulation Thickness	0.75 mm
Nom. Overall Diameter	2.00 mm
Nom. Conductor Resistance	98 Ω/km
Insulation Resistance	50 MΩ @ 500 Vdc

### ORDERING INFORMATION

Part Number	Colour Identification	Type
211-13021002A	White/Blue 0.5 mm Jumper Wire	Twin
211-13021002B	Yellow/Blue 0.5 mm Jumper Wire	Twin
211-13021002C	White/Red 0.5 mm Jumper Wire	Twin

### PACKING INFORMATION

Cable Length (metre)	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
200	Cardboard Reel	0.60	0.70	260 x 285 x 350
500	Cardboard Reel	1.50	1.60	260 x 285 x 350