


2 Core 20 AWG Shielded Multi Conductor Cable



The Shielded Multi Conductor Cable from NORDEN is suitable to use within Audio, Control and Instrumentation purpose. The cable is constructed with PE Insulation, 100 % Aluminium Foil – Polyester Tape Shielded and PVC/LSZH outer jacket.

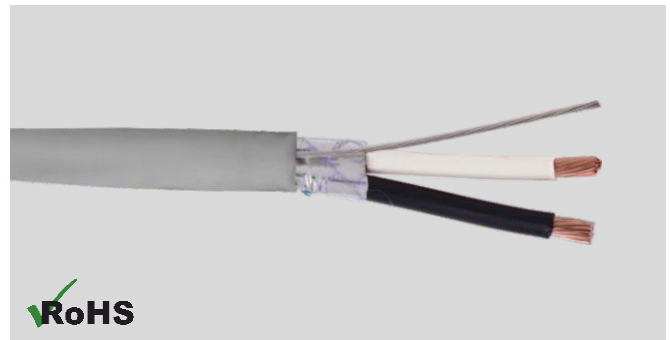

CABLE CONSTRUCTION

Conductor

Bare Copper

Shielding

100% Aluminium Foil - Polyester Tape

Outer Jacket

PVC (Polyvinyl Chloride)/LSZH

Insulation

PE (High Density Polyethylene)

Drain Wire

Tinned Copper

Jacket Color

Grey

PHYSICAL CHARACTERISTICS


Characteristic	Value
No. of Conductor	2
Conductor Size	20 AWG, 7 x 28
Insulation Diameter	1.32 mm
Drain Wire Size	22 AWG, 7 x 30
Jacket Thickness	0.44 mm
Jacket Diameter	3.50 mm
Max. Recommended Pulling Tension	80 N
Min. Bending Radius Minor Axis	28.0 mm
Operating Temperature	-10°C to +60°C

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Nom. Conductor DCR	Ω/km	33.8
Dielectric Strength between Pairs	KV/5min	1.5
Max. Operating Voltage UL	V/min	300

MECHANICAL CHARACTERISTICS

Characteristic	Value
Test Material	PVC/LSZH
Before Tensile Strength (Mpa)	≥ 13.8
Aging Elongation (%)	≥ 100
After Tensile Strength (Mpa)	≥ 10.35
Aging Elongation (%)	≥ 75
Cold Bend [-20±°C x 4 hrs]	No Crack

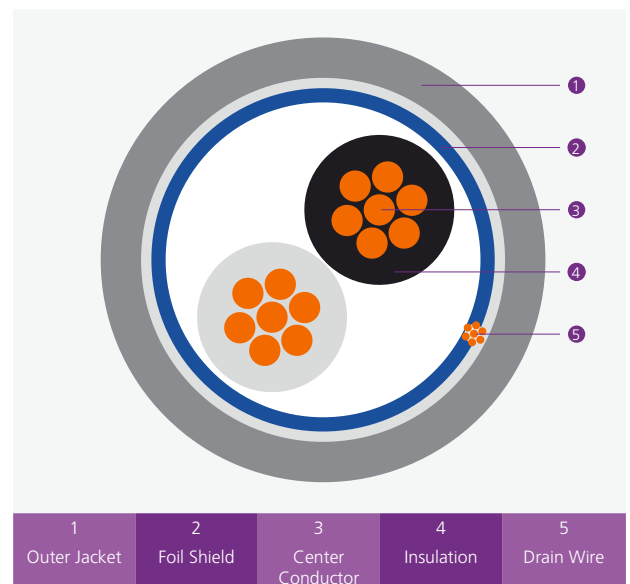

2 Core 20 AWG Shielded Multi Conductor Cable



INSULATION COLOUR CODE

Individual Core	Colour
Core 1	Black
Core 2	White

ORDERING INFORMATION

Part Number	Description	Net Weight (Kg/Km)
71-3202201	2 Core 20 AWG Shielded Multi Conductor Cable PVC, 305m	23.2
71-3202202	2 Core 20 AWG Shielded Multi Conductor Cable LSZH, 305m	24.4