# 4Bay 16Ch POE Network Video Recorder

**EYENOR**®

## ENR-04016-N-16P

## FEATURES

| |
|---|
| Support Drag Tree Menu, Easy for Man-Machine Dialogue and Setting the Parameters |
| Support 15X Digital Enlarge, Dragging any Enlarged Image by Mouse(Preview, Playback); |
| Support Instant Screenshoot, Individual area for Storage in HDD |
| Support USB Disk Backup File playback and check on Host Directly, Convenient to playback the Backup File |
| Support Standard ONVIF, High Profile S, High Profile G |
| Support Private Protocol Access, can work with the Network Camera which conform to ONVIF, RTSP Standard and many Main Factories |
| Support Image Preview and Digital Enlarge for Playback Image |
| Support Check, Playback, Backup Recording Files by Event; Support P2P |

ONVIF — Onvif | PoE | H.264 | E-mail | Net | Motion Detection | 3D DNR

## SPECIFICATION

| MODEL | Model No. | ENR-04016-N-16P |
|---|---|---|
| | Type | 4Bay 16Ch PoE Network Video Recorder |
| SYSTEM | Operation System | Embedded LINUX |
| | Video Input | 9×(2592*1944)+sub[960*576]+4Ref.+1Play, 9×(2048*1536)+sub[960*576]+4Ref.+4Play 16x(1920*1080)+sub{720*576}+4Ref.+4Play |
| | Video Output | 1CH*HDMI, 1CH*VGA |
| | Audio Input | 16 Ch |
| | Audio Output | 1Ch RCA |
| FUNCTION & FEATURE | Sync. Playback | 1/4/8CH |
| | Recording Mode | Support Manual, Auto, Dynamic Detection, Alarm Trigger Recording |
| | Backup Mode | HDD, USB Disk, USB Mobile HDD, USB DVD-RW, Network Storage and Backup |
| | Mobile surveillance | Support Smart Phone: iPhone, Windows Mobile, BlackBerry, Symbian, Android, etc |
| | Motion Detection | Each Screen can set Multiple Detection Areas, 6 Level Detection Sensitivity (IPC Support) |
| | Privacy Mask | Each Channel Support 4 Privacy Mask Areas (IPC Support) |
| | Log in | By User ID & Password Locally or Remotely |
| | Recording Way | Local HDD / Remote Network Host |
| | HDD | 4*SATA HDD |
| | Max. Capacity | 6TB |
| INTERFACE | Network Port | 1*RJ45, 10M/100M/1000M Self-Adaptive Ethernet Interface |
| | PoE Port | 16*RJ45, 10/100Mbps Self-Reliant Ethernet Interface |
| | Standard | IEEE802.3af (208 W) |
| | Rs485 | 1*Full Duplex Standard RS485 Interface |
| | USB Port | 2*USB 2.0 |
| | Alarm Input | 4Ch |
| | Alarm Output | 1Ch |
| GENERAL | Power Supply | AC 110V~240V |
| | Consumption | ≤115W(without HDD) |
| | Working Temperature | -10℃ ～ +55℃ |
| | Working Humidity | 10％-90％ |
| | Dimension (mm) | 350mm×240mm×68mm |
| | Weight | N.W: 1.7Kg, G.W: 2.9Kg |

# 4Bay 16Ch POE Network Video Recorder

ENR-04016-N-16P

**Dimension Unit: mm**



350 mm

68 mm

240 mm
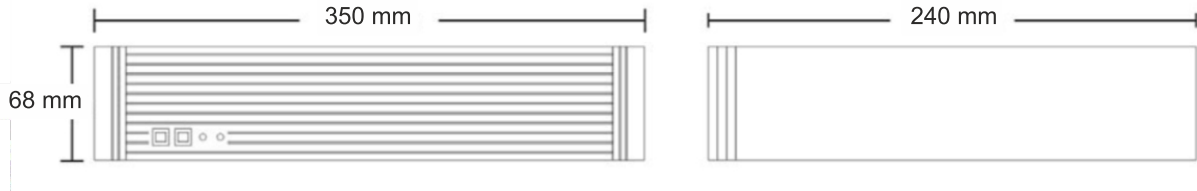
## Ordering Information

| Part Number | Description | Standard Quantity |
|---|---|---|
| ENR-04016-N-16P | 16Ch Embedded Network Video Recorder With 4 HDD Bays Supports 16#POE Ports, HDMI, VGA and ONVIF | 1 |

## Packing Information

| Part Number | Packing Mode | Gross Weight (kg) | Dimension (mm) |
|---|---|---|---|
| ENR-04016-N-16P | Carton Box | 2.9 | 350×240×68 |