

6 Zone Remote Paging Microphone with Volume Control



DESCRIPTION

The NVS-PA0032006PM is a remote paging station used in conjunction with the NVS-PA0028006CP/NVS-PA0029006CP/NVS-PA0030006CP/NVS-PA0031006CP six-zone amplifier. It adopts touch-key technology, glass panel craft, anti-fingerprint coating and high-gloss bevel cutting techniques. It is smooth in touching, exquisite and beautiful in appearance and fashion in style. Equipped with simple operation and intuitive signal display, it corresponds to the amplifier 6-zone toggle switch, which makes switching calls easy and fast. This paging station is highly stable and has a low failure rate, making it an ideal choice for a high-quality paging station.

FEATURES



- ⊙ Zone-independent switches for quick control of six-zone switches of the amplifier.
- ⊙ Featured by signal level indication
- ⊙ With key lock function
- ⊙ 2 chime tones, chime up and chime down
- ⊙ Dual RJ45 interfaces have zone control and override function
- ⊙ Maximum cascading 3 paging stations per channel
- ⊙ 300m-600m transmission distance
- ⊙ One-channel hidden microphone volume knob
- ⊙ One key to page all zones.
- ⊙ With anti-fingerprint coating for the touch panel.
- ⊙ With priority function, with the ID6 as the highest-priority paging microphone.

Specifications

Model	NVS-PA0032006PM
Sensitivity	30±3mV
Frequency Response	200Hz-15KHz
Signal to Noise Ratio	≥70db
RJ45	RS485 communication protocol
Input Power	Host power supply
Dimension	172×160×53mm
Weight	0.89Kg


6 Zone Remote Paging Microphone with Volume Control

FRONT PANEL

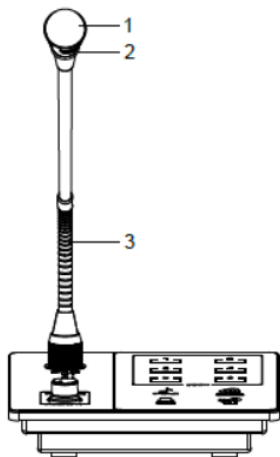

- 1. Microphone Head
- 2. Microphone Switch Indicator Ring
- 3. Microphone rod (The angle can be adjusted freely)
- 4. Five pin XLR
- 5. Four-segment level indicator
- 6. Power Supply Indicator
- 7. AUX/MP3 Indicator
- 8. AUX/MP3 Volume Knob
- 9. Six-zone touch buttons 1-6 (blue backlight marks selected)
- 10. Source toggles button
- 11. All-zone broadcast button
- 12. Voice broadcast button
- 13. Chime button

REAR PANEL



- 1. Power Switch
- 2. Dual RJ45 remote communication and audio transmission interface
- 3. Microphone gain knob
- 4. 8 DIP Switches

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-PA0032006PM	6 Zone Remote Paging Microphone with Volume Control	01

ACCESSORIES INFORMATION

Description	Standard Quantity
Microphone Cap	01
Microphone Rod(L=415mm)	01

6 Zone Remote Paging Microphone with Volume Control

Certificate	01
Warranty Card	01
User Manual	01