

## NVS-70110010PA

# PRE AMPLIFIER




### FEATURES

- ⊙ 10 inputs (5 microphone inputs, 3 auxiliary inputs, 2 emergency inputs) and 2 outputs.
- ⊙ Individual input volume control and master tone control.
- ⊙ LED level indicate for each channel
- ⊙ Built-in chime and muting function.
- ⊙ Bass and Treble tone control.

Specifications	
Model	NVS-70110010PA
Inputs	Mic1, 2, 3, 4, 5: 600Ω, 2.5mV, unbalanced Aux1, 2, 3 : 10kΩ, 250mV, unbalanced
Audio output	0dBV
Frequency response	Mic: 100Hz-15kHz ( ±3dB ) ; Line: 20Hz-18kHz ( ±3dB )
Signal/ noise ratio	Mic input : 80dB Aux input : 90dB
Tone	Bass : ±10dB ( 100Hz ) Treble : ±10dB (10kHz)
Protection	AC fuse
Power Requirement	AC 220-240V/50-60Hz
Outer Packing Size ( L×W×H )	530×440×195 (mm)
Unit Size ( L×W×H )	484×365×88 (mm)
Gross weight	8kg
Net weight	6.2kg


# NVS-70110010PA PRE AMPLIFIER

## Front Panel

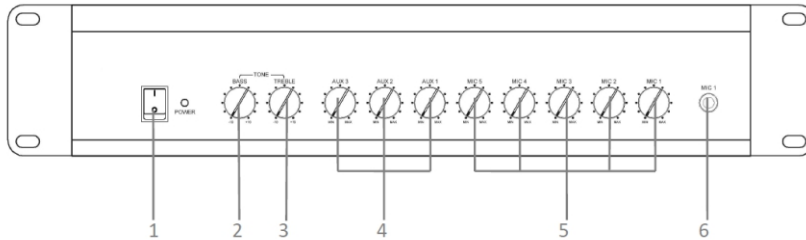

- 1. Power switch.
- 2. Bass control.
- 3. Treble control.
- 4. AUX 3, 2, 1 volume control.
- 5. MIC 5, 4, 3, 2, 1 volume control.
- 6. MIC 1 input.

## Rear Panel

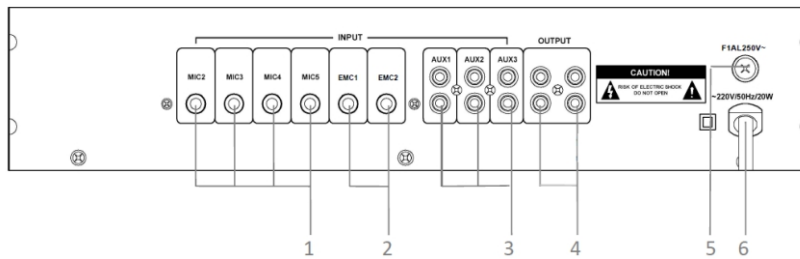

- 1. MIC 2, 3, 4, 5 inputs.
- 2. EMC 1, 2 inputs.
- 3. AUX 1, 2, 3 inputs.
- 4. OUTPUT jacks.
- 5. AC FUSE.
- 6. AC power cord.

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-70110010PA	Pre amplifier	1 No.

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight(kg)	Dimensions(mm)
NVS-70110010PA	Carton Box	8	484×365×88