

Ceiling Speaker with Fire Dome 6W



DESCRIPTION

The NVS-10420006CS is a Ceiling Speaker with a fire dome and a built-in 70V/100V transformer. The transmission takes place in a high-voltage, low-current environment. Low-current mode allows for longer transmission distances and parallel connections of many loudspeakers. This speaker has a broad frequency response (100-16,000Hz). It's composed of high-quality steel and comes with clamps for easy installation. It'll last a long time and never go out of style or fade. The flush mount style of the dual-crossover construction allows for simple and secure installation. It can be used in a different occasions with varying area sizes and background noises, such as a train station, a park, a school, a square, a military camp, an industrial park, and so on.

FEATURES

- ⦿ Long life
- ⦿ Equipped with clamps for installation
- ⦿ Long-term durability
- ⦿ Made of high-class steel
- ⦿ Built-in 100V/70V transformer

Specifications



Model	NVS-10420006CS
Rated Power	6W
Frequency Response	100Hz-16kHz
Power Taping Options	1.5/3/5/6W
Input Voltage/Impedance	70V/100V
Sensitivity(1m,1w)	91dB±2dB
Maximum SPL(1m)	96dB±2dB
Weight	1.2Kg
Dimension	Ø180 x 100 mm

NVS-10420006CS



Ceiling Speaker with Fire Dome 6W

DIMENSION

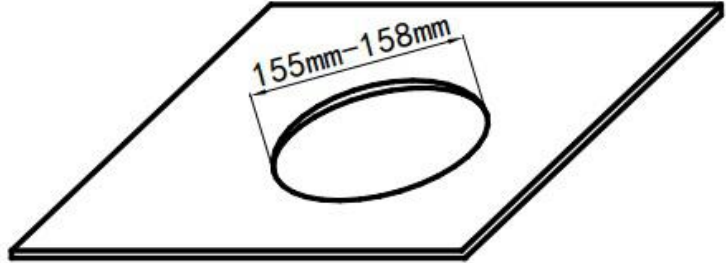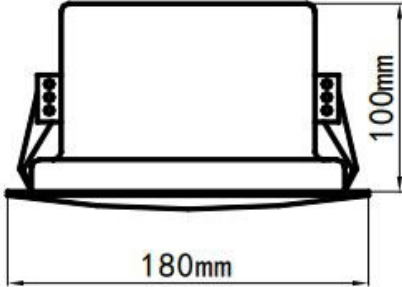

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10420006CS	Ceiling Speaker with Fire Dome 6W	1