

# 150W 6 Zones Mixer Amplifier with Audio Player and Timer Function



Mixer Amplifier

## DESCRIPTION

The NVS-90060156MA integrated Mixer Amplifier is a 6-zone mix amplifier with built-in U disc, SD card, radio tuner, Bluetooth, zone, and timer functionality. It has a number of features, including the ability to play song files, a radio, set timers, and more. Touch screen control, all graphical interface, very simple and user-friendly operation. The product can be used broadly and can fulfil user requirements. It is equipped with a built-in radio, it can be manually / automatically searched and can store up to 40 radio channels.

## FEATURES

- ⦿ Touch and button-pressing control
- ⦿ Two kinds of control modes — schedule and manual
- ⦿ Mic input with muting priority
- ⦿ Separate volume control for MP3/FM/Bluetooth, AUX, Mic inputs
- ⦿ Support USB/SD/MP3/AM & FM/Bluetooth/schedule player
- ⦿ 1 AUX ,1 Mic input ,1 AUX output
- ⦿ Built-in 4G MP3 program memory
- ⦿ Built-in Bluetooth receiver module

Specifications	
<b>Model</b>	<b>NVS-90060156MA</b>
Rated Power	150W
Speaker Outputs	100V
Total Harmonic Distortion	<0.5% (1kHz , 1/3 rated power)
Auxiliary Output	100Ω, 1V(0dBV)
Input	Mic: 600Ω; 10mV (±10%) Line: 10kΩ, 300mV (±10%), unbalanced
Line Frequency Response	50Hz-18kHz (±3dB)
Microphone Frequency Response	40Hz-16kHz (±3dB)
Signal to Noise Ratio	Microphone: 70dB Line: 85dB
Tone	Bass: ±10dB (100Hz) Treble: ±10dB (10kHz)
Protection	AC fuse, DC output protection, overload protection.
Power Supply	AC220-240V/50-60Hz
Power Consumption	220W
Dimension	430x360x88mm


# 150W 6 Zones Mixer Amplifier with Audio Player and Timer Function

## FRONT PANEL



- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1. Power switch</li> <li>2. Power indicator</li> <li>3. USB port</li> <li>4. Often-used function selection buttons</li> <li>5. Display screen</li> <li>6. MP3/FM/Bluetooth volume control button</li> </ul> | <ul style="list-style-type: none"> <li>7. Aux volume control button</li> <li>8. Microphone volume control button</li> <li>9. Microphone interface</li> <li>10. Button for all volume together</li> <li>11. Treble button</li> <li>12. Bass button</li> </ul> |
|--|--|

## REAR PANEL

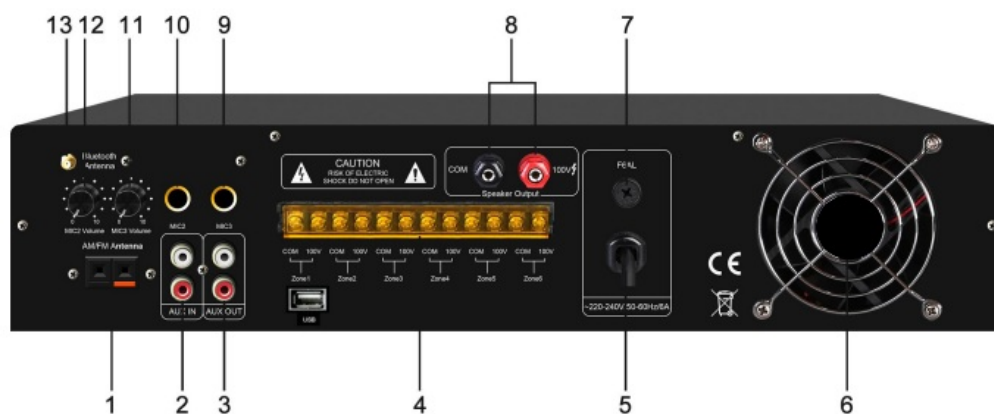

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>1. AM/FM antenna</li> <li>2. AUX IN</li> <li>3. AUX OUT</li> <li>4. Zone output terminal</li> <li>5. Power cord</li> <li>6. Fan cooling window</li> <li>7. Fuse holder</li> </ul> | <ul style="list-style-type: none"> <li>8. Speaker output terminal</li> <li>9. MIC3 IN</li> <li>10. MIC2 IN</li> <li>11. MIC3 volume control</li> <li>12. MIC2 volume control</li> <li>13. Bluetooth antenna</li> <li>14. USB on the rear panel</li> </ul> |
|--|---|

# 150W 6 Zones Mixer Amplifier with Audio Player and Timer Function

**ORDERING INFORMATION**

Part Number	Description	Standard Quantity
NVS-90060156MA	150W 6 Zones Mixer Amplifier with Audio Player and Timer Function	01

**ACCESSORIES INFORMATION**

Description	Standard Quantity
1.5m Audio Cable	01
FM/AM Antenna	01
Bluetooth Antenna	01
USB Flash Disk	01
User Manual	01
Warranty Card	01
Certificate	01