

2MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU5Z-200R-24

FEATURES

316L Stainless Steel Construction

6 ~ 240 mm Lens

40X Optical Zoom, 16X Digital Zoom


ONVIF Profile (S, G, T)

Audio and Alarm Support

Wiper Support

IP68

ATEX/ IECEx/ CCoE (PESO) Certified

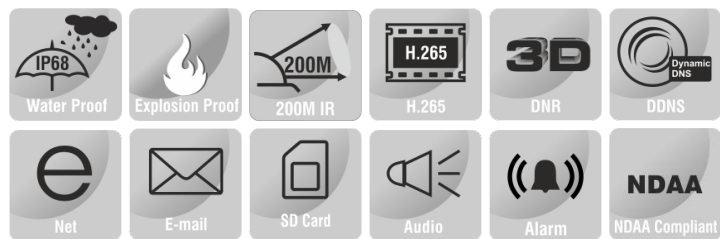

SPECIFICATION

MODEL	Model No.	ENC-HBU5Z-200R-24
	Type	2MP EXPLOSION PROOF BULLET CAMERA
CAMERA	Image Sensor	1/1.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized Zoom Lens
	Focal Length	6~240 mm Lens (optional 5~200 mm Lens)
	Focus	Auto / Semi Auto/ Manual
	Iris Type	DC Auto Iris
	Angle of View (H)	47.4 ° ~ 1.3 ° (Optional 55.6 ° ~ 1.5 °)
	Angle of View (V)	27.8 ° ~ 0.7 ° (Optional 32.7 ° ~ 0.8 °)
	Angle of View (D)	54.9 ° ~ 1.4 ° (Optional 64.5 ° ~ 1.7 °)
	Aperture Range	F1.5 ~ F4.2
	Optical Zoom	40X
	Digital Zoom	16X
	Shutter	1s - 1/100,000s, Auto/Manual
	Min. Illumination	Color: 0.001 lux @ F1.5, B/W: 0.0001; 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 200 m	

2MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU5Z-200R-24

MODEL	Model No.	ENC-HBU5Z-200R-24
	Type	2MP EXPLOSION PROOF BULLET CAMERA
VIDEO	Max. Resolution	1920x1080
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720)@ 50/60fps Sub Stream: (1920x1080, 1280x720, 704x576) @ 25/30fps Third Stream: (640x480, 352x288, 320x240, 176x144) @ 25/30fps Fourth Stream: Optional
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate, EIS
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day / Night, Tungsten, Manual
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 40 regions (each scene up to 8)
AUDIO	Audio Compression	G.711U, G.711A
	Audio I/O	1/1
	Audio Bit Rate	8 kbps ~ 16 kbps
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double crossline (Double Tripwire)
	Intelligent Identification	Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Abnormal Video & Audio Detection, Wrong Way Detection, Illegal Parking, Tampering / Masking / Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail, HTTP, FTP, SD Card & Alarm Out (Event Notification/ Recording/ Snapshot upload through E-mail, HTTP, FTP & SD Card)
INTERFACE	Protocols	TCP/IP, UDP, IPv4/IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTCP, RTSP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, Unicast, Multicast, SNMP, ARP, TLS
	Security	TLS 128 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm Interface	7 Input / 2 Output
	Serial Interface	1xRS485
	Edge Storage	SD card slot, up to 256 GB
	ANR	Supported
	Built-in Heater	Supported (Optional)
	Wiper	Supported
	Max. User	32
GENERAL	Client Application	EyeGuard
	Power Supply	AC 110V ~ 240V / 24V DC / 24V AC / PoE+ (802.3at-Type 2)
	Power Consumption	Max. ≤30W (with thermostat)
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	0-95% RH (non-condensing)
	Atmospheric pressure	80 kPa ~ 106 kPa
	Window glass	Strong tempered glass
	Sun shade	Supported
	Ingress Protection	IP68
	Vandal Resistant	IK10(Housing)
	Surge Protection	TVS4000V
Reset Button	Supported	
Dimensions	523x406x221 mm	
Net Weight	17.5 kg	


2MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU5Z-200R-24

MODEL	Model No.	ENC-HBU5Z-200R-24
	Type	2MP EXPLOSION PROOF BULLET CAMERA

Dimension Unit : mm

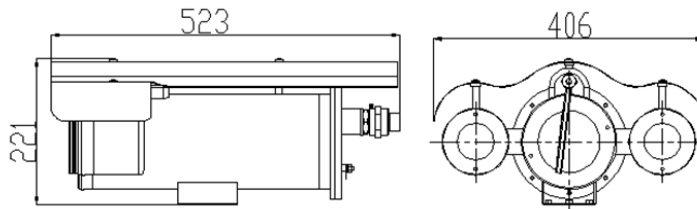

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU5Z-200R-24	2MP SS316L 60FPS Explosion Proof IR IP H.265 Bullet camera with 40X Optical Zoom Lens, PoE+, SD card slot, WDR, Smart Analytics Wiper and 200m IR support	1
ENB-BZUW68	Wall Mount Bracket for Eyenor Explosion / Corrosion Proof Bullet Camera	1
ENB-BZUH68	Corner Mount Bracket for Eyenor Explosion / Corrosion Proof Bullet Camera	1
ENB-BZUV68	Pole Mount Bracket for Eyenor Explosion / Corrosion Proof Bullet Camera	1
ENA-EXH010	1 Meter Explosion / Corrosion Proof Hose for Eyenor Explosion / Corrosion Proof Camera	1
ENA-EXH015	1.5 Meter Explosion / Corrosion Proof Hose for Eyenor Explosion / Corrosion Proof Camera	1
ENA-EXH020	2 Meter Explosion / Corrosion Proof Hose for Eyenor Explosion / Corrosion Proof Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU5Z-200R-24	Carton Box	-	-