


32CH EMBEDDED NETWORK VIDEO RECORDER **EYENOR**[®]

ENR-02032-N-LK

FEATURES

- 32 Channel Input
- Support H.265+, H.265, H.264 Video Formats
- 2 SATA HDDs
- HDMI and VGA Simultaneous Output
- ONVIF Profile (S, G, T)

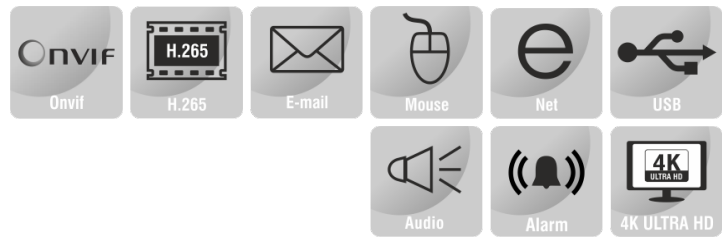

SPECIFICATION

MODEL	Model No.	ENR-02032-N-LK
	Type	32CH EMBEDDED NETWORK VIDEO RECORDER
VIDEO & AUDIO	Video Input	32-Ch
	Incoming Bandwidth	160 Mbps
	Outgoing Bandwidth	48 Mbps
	HDMI / VGA Output	HDMI: 3840x2160, 2560x1440, 1920x1080, 1440x900, 1280x800, 1280x720, 1024x768 VGA: 1920x1080, 1440x900, 1280x800, 1280x720, 1024x768
	Audio Input / Output	1-Ch Input (3.5 mm) / 1-Ch Output (RCA)
	Two-way Audio	Supported
	Screen Split	1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32
	Video Encryption	Supported
OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes	
DECODING	Video Compression	H.265+, H.265, H.264
	Video Bit Rate	32 kbps ~ 16 Mbps (per channel), CBR, VBR
	Audio Compression	G.711A/G.711U
	Audio Bit Rate	8 kbps ~ 48 kbps
	Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UJXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Recording Mode	Continuous, Manual, Event (Pre/Post, Motion etc.), Schedule, ANR, Record Interval by Time / Size
	Pre/Post Record Time	Pre (5~60 sec); Post (10~600 sec)
	Fisheye Camera	N/A
De-warping	N/A	

32CH EMBEDDED NETWORK VIDEO RECORDER

ENR-02032-N-LK

MODEL	Model No.	ENR-02032-N-LK
	Type	32CH EMBEDDED NETWORK VIDEO RECORDER
MONITORING	Preview Capability	2x8MP/2x6MP/3x5MP/4x4MP/5x3MP/8x1080P/16x720P
	Synchronous Playback	2x8MP/2x6MP/3x5MP/4x4MP/5x3MP/8x1080P/8x720P
	Live View Functions	Screen matrix, Stream type, System alarm, Snapshot, Record, Talkback, Volume adjustment, Full screen, Digital zoom
	Playback Functions	Sync playback, Play, Pause, Stop, Fast play, Slow play, Full Screen, Backup selection, Snapshot, Clip management, Screen matrix, Stream type
	Corridor Mode	Supported
	Backup Mode	USB, Network, SATA burner
	Export Picture Format	JPG
	Export Video Format	MP4, SDV, AVI
	Download from Edge storage	MP4, SDV, AVI
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTP, RTSP, RTCP, RTMP, FTP, NFS, PPPoE, NTP, UPnP, SMTP, IGMP, Multicast, ARP, SNMP, SSL, P2P
	Compatibility	ONVIF Profile (S, G, T)
	Network	1xRJ45 (10/100/1000 Mbps) Self Adaptive Ethernet Port
	Serial Interface	N/A
	USB Interface	2xUSB 2.0
	Alarm Interface	4 Input & 1 Output
SMART	Alarm Management	Input & Output event, Alarm I/O error, Illegal access, IP Conflict, MAC Conflict, Network Interrupt, Hard disk full, No hard disk, Hard disk R/W error, Hard disk overload, HDD SMART check error, Abnormal recording, Abnormal temperature, Motion detection, Tampering (Masking), Smart detection, Video loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Running, Abandoned object (Object Left), Missing object (Object Lost), Parking, Face Detection (Capture), People Counting, Crowd Detection, On Duty Detection, Abnormal Video & Audio Detection, Auto Tracking, Heatmap, License Plate Recognition **Compatible with analytic supported cameras
STORAGE	SATA	2 SATA Interfaces
	Capacity	Up to 10 TB for each HDD
	Array Type	N/A
	e-SATA	N/A
	ANR	Supported
GENERAL	Main Processor	Quad Core Embedded Processor
	Operating System	Embedded Linux
	User Permission	32 with multiple privilege level
	Web Client	EyeConnect
	Web Language	14
	Power	DC12V 3.3A
	Redundant Power	N/A
	Power Consumption (without HDD)	≤ 10 W
	Working Environment	-10 °C ~ 55 °C
	Humidity	10% ~ 90% RH
	Chassis	1U
	Dimension	47.5x277x440 mm
Net Weight	2.3 kg	

32CH EMBEDDED NETWORK VIDEO RECORDER **EYENOR**[®]

ENR-02032-N-LK

MODEL	Model No.	ENR-02032-N-LK
	Type	32CH EMBEDDED NETWORK VIDEO RECORDER

Dimension Unit : mm



ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-02032-N-LK	32Ch Embedded Network Video Recorder with 2 HDD Bays, Supports 4K Cameras, HDMI, VGA and ONVIF	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-02032-N-LK	Carton Box	3.97	47.5×277×440