

IR IP H.265 COMPACT BULLET CAMERA



ENV-HCB5F/7F-30R-17


FEATURES

- Day/night functionality
- Smart IR, up to 30M
- 2D/3D DNR
- H.265+, H.265, H.264, MJPEG
- Triple streams
- ONVIF (Profile S/G)
- IP67



UL No: E491809

Field Of View

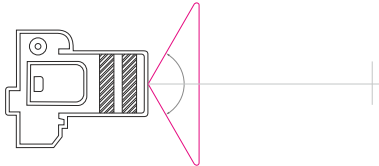

SPECIFICATION

MODEL	Model No.	ENV-HCB5F-30R-17	ENV-HCB7F-30R-17
CAMERA	Type	2MP IR IP H.265 Compact Bullet Camera	4MP IR IP H.265 Compact Bullet Camera
	Image Sensor	1/2.7", 2.0 Megapixel, Progressive scan, CMOS	1/3", 4.0 Megapixel, Progressive scan, CMOS
	Lens	4.0mm (Optional 2.8, 6mm)	
	Angle of View(H)	86.5° (55.4° For 6mm)	78.9°(49.9° for 6mm)
	Shutter	Auto/Manual, 1~1/100000s	
	Min. Illumination	Color: 0.02Lux @F2.0 BW: 0 Lux with IR on	Color: 0.03Lux@F2.0, BW: 0 Lux with IR on
	AGC	Auto/Manual	
	IR Range	Up to 30M IR range	
	Day/Night	IR-cut filter with auto switch (ICR)	
	S/N	>52dB	
WDR	DWDR		
Digital Noise Reduction	2D/3D DNR		
VIDEO	Max. Resolution	1920 × 1080	2592 × 1520
	Video Compression	H.265+, H.265, H.264, MJPEG	
	Frame Rate	MainStream: 1080P(1920*1080),Max30fps; SubStream: 720P(1280*720), Max30fps; ThirdStream: CIF(352*288),Max30fps	MainStream: 4MP(2592*1520),Max20fps; SubStream: 720P(1280*720),Max 20fps; ThirdStream: D1(720*576),Max20fps
	Video Streaming	Triple	
	HLC/BLC	Supported	
	OSD	Up to 4 OSDs	
	ROI	Up to 2 areas	
	Motion Detection	Up to 4 areas	
NETWORK	Privacy Mask	Up to 8 areas	Up to 4 areas
	Protocol	IPV6, IPV4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS	
	Compatibility	ONVIF (Profile S/G), API	
	Network	10/100MBase-TX Ethernet	



IR IP H.265 COMPACT BULLET CAMERA




ENV-HCB5F/7F-30R-17

SPECIFICATION

MODEL	Model No.	ENV-HCB5F-30R-17	ENV-HCB7F-30R-17
	Type	2MP IR IP H.265 Compact Bullet Camera	4MP IR IP H.265 Compact Bullet Camera
Power	12VDC, PoE (IEEE802.3af)	12VDC, PoE (IEEE802.3af)	
	Power consumption: Max 4.5W	Power consumption: Max 4.0W	
GENERAL	Working Environment	-30°C ~ +60°C, Humidity ≤ 95% RH(non-condensing)	
	Ingress Protection	IP67	
	Dimensions	167.3×62.9×62.7mm	
	Weight	0.37kg	
	Reset Button	Supported	

Dimension Unit: mm

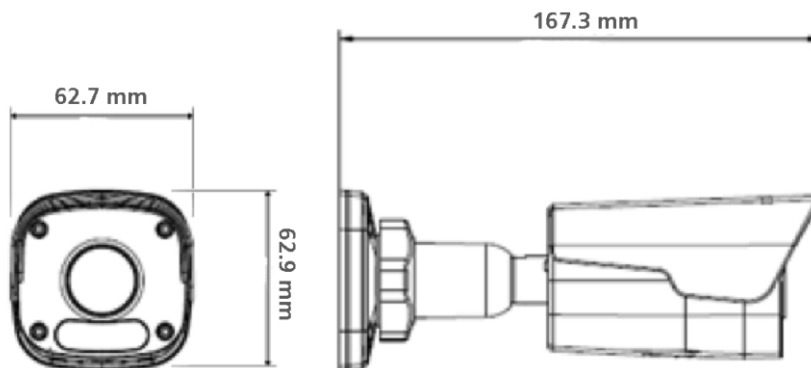

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCB5F-30R-17	2MP IR IP H.265 Compact Bullet camera with 4mm (Optional 2.8mm, 6mm) Fixed Lens, POE and 30M IR support	1
ENV-HCB7F-30R-17	4MP IR IP H.265 Compact Bullet camera with 4mm (Optional 2.8mm, 6mm) Fixed Lens, POE and 30M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HCB5F-30R-17	Carton Box	0.37	167.3×62.9×62.7
ENV-HCB7F-30R-17	Carton Box	0.37	167.3×62.9×62.7

