

## 4.5" Fireproof Ceiling Speaker 6W



### DESCRIPTION

NVS-10450006CS is a ceiling speaker with a built-in transformer of 70V/100V. This transmission is realized in a high-voltage, low-current mode, which makes possible of longer distance transmission and parallel connection of multiple loudspeakers. The built-in 4.5" speaker driver is designed of wide frequency response and also have multiple terminals options that can be applied to different occasions vary in area sizes and background noises. This speaker made of high-class steel. This ensures long-term durability, and will never be out of shape. Equipped with fire dome which is hard to burn during fire situation. It is an ideal choice for industrial and commercial applications like in hotel, school, office and factory where background music and paging is required.

### FEATURES

- ⦿ In-ceiling type loudspeaker
- ⦿ Comply with EN54-24 requirements
- ⦿ High-class steel and form by stamping
- ⦿ Aluminum grille, stainless and durable
- ⦿ Clip type flush mount design for easy installation
- ⦿ Built-in 70V/100V transformer



Specifications	
Model	NVS-10450006CS
Rated Power	6W
Driver Unit	4.5" X 1
Frequency Response	250Hz -16kHz
Power Taping Options	1.5/3/6W
Sensitivity (1m,1w)	91dB
Maximum SPL (1m)	97dB
Weight	1.2kg
Dimension	Ø174x110mm
Cutout Size	Ø155 - Ø158mm

NVS-10450006CS



# 4.5" Fireproof Ceiling Speaker 6W

## DIMENSION

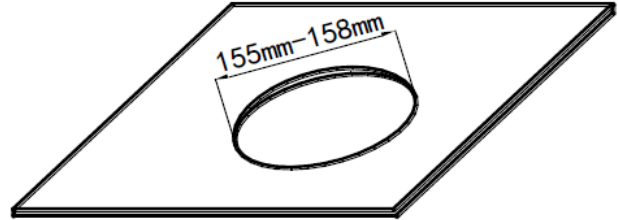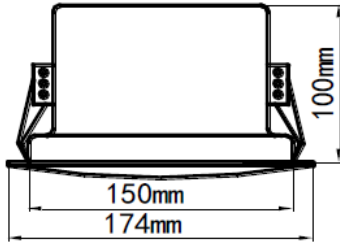

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-10450006CS	4.5" Fireproof Ceiling Speaker 6W	01