

IP-PDU WITH UNIVERSAL SOCKET



NORDEN Universal Socket IP-PDU Units are designed and manufactured in a Modularized way exclusively for cabinets. The product is equipped with supply socket modules meeting different systems and standards in the world. The series products can be produced according to the customer's special requirements. Additionally, The PDU is in 2 phases and adds the functionality of remote monitoring of total current, voltage, power, total energy consumption, frequency power factor, and temperature/humidity sensor status. User-defined alarms can set the total load current via web-based access.

COMPLIANCE

En55022, EN61000, IEC/EN 60950, IEC/EN 62368
RoHS 2.0

DESIGN & MATERIALS

Material of Construction	Aluminium Alloy Case
Shell Material & Colour	Aluminium, black
Outlet Qty.	08-Way
Plug Type	BS 1363 13A plug
Power Input Style	Left-end single input style
Bracket Installation Style	19" Horizontal Installation Style (07-way), Vertical Installation Style (20-way)
Lead length	3 m, 5 m (other cable lengths available on request)


ENVIRONMENTAL & COMMUNICATION

Nominal Voltage	230V
Maximum Input/Output Current	13A
Input frequency	50 or 60 Hz
Power capacity	3680W
Operating Relative Humidity	5%-95%
Operating Elevation	0~3000 mm
Input/Phase/Circuit Metering	Yes
Breaker Status Monitoring	No
Metering Accuracy	+/- 1%
Outlet Locking	No
Circuit Overload Protection	None
Surge Protection	None
Environmental Monitoring	Temperature, Humidity
Monitoring Parameters	Voltage (V), Current (A), Active Power (kW), Apparent Power (kVA), Energy (kWh), Power Factor, Frequency(Hz)
Access	SNMP (V1,V2c,V3) , Http/Https, Telnet, Modbus-RTU
Alerts	Voltage, Current, (Temperature, Humidity optional)
Service	TFTP, SMTP

IP-PDU WITH UNIVERSAL SOCKET

Drawing

08 Way

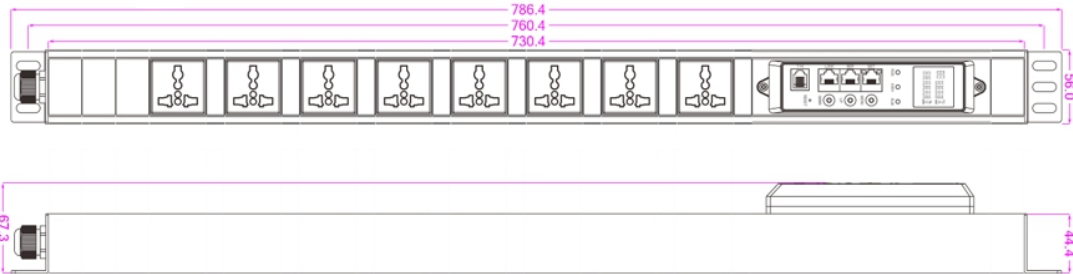

PHYSICAL CHARACTERISTICS

Product Dimensions (HxWxD)	786.4 x 56 x 44.4 mm
Box Dimensions (HxWxD)	800 x 105 x 80mm
Product Weight	2 KG
Box Weight	2.5 KG
Mounting Style	2 ends Brackets
Mounting Distance	760.4 mm

ORDERING INFORMATION

Part Number	Description
156V-108U08N002X	08 Way Universal Socket,13A UK Plug, IP-PDU, 3 Meter Cable Length 19" Horizontal Installation